

100-DIS-F

Trench Drain Grate



PRO-PLUS® 100

Specification

Josam 100-DIS-F epoxy coated, ductile iron slotted grate with center hole for locking bar securement and four point lock securement. -PS option provides PRO-SNAP® securement (see 100-DIS-F-PS submittal). Designed to fit PRO-PLUS® 100 size channel. Meets ADA slot requirements.

Load ratings EN/DIN: F H20: Y

Note: Free area is 28.6 SQ. IN. per 1/2 meter grate.

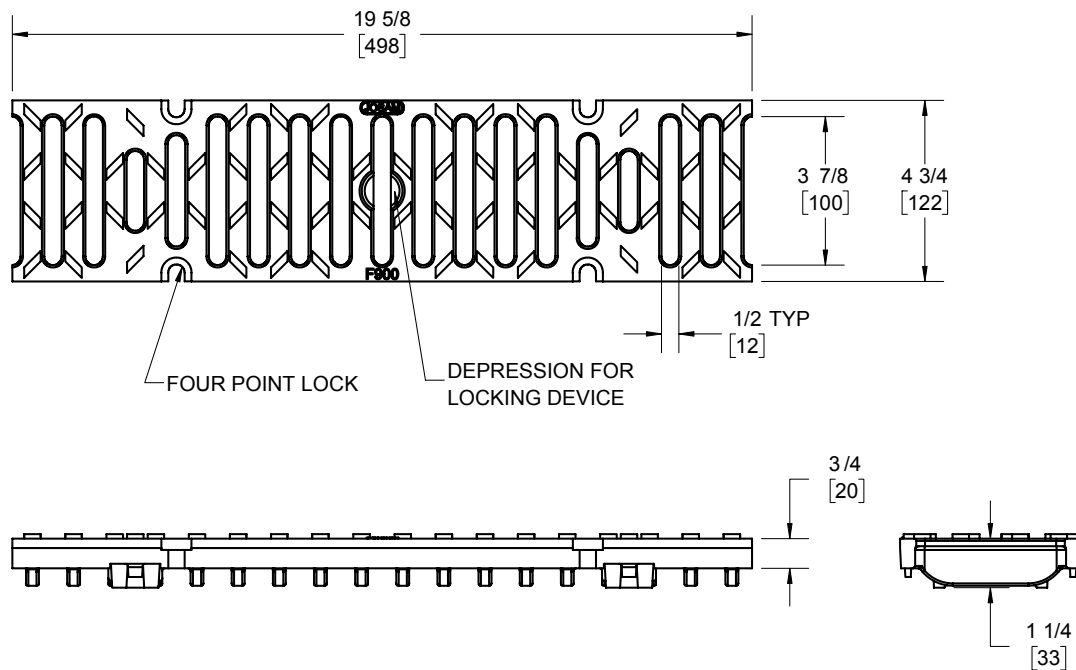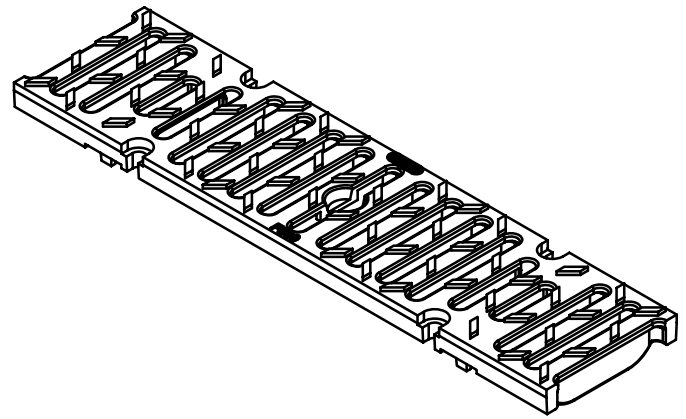

	Locking bar (order separately)	360141
	Bolt down (order separately)	360143

	Made in USA
--	-------------

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



A WATTS Brand