

12684-HS-58

Closet Carrier

Right Hand, Long Barrel, Hub & Spigot

Specification

Josam 12684-HS-58 series coated cast iron single horizontal long barrel 4" hub & spigot right-hand offset fitting with 2" hub & spigot vent and adjustable carrier body, invertible for siphon jet or blowout closets, with ABS extension with integral test cap, pylon feet, anchor foot, plated hardware and neoprene fixture gasket. 500 LB capacity.

▮ For dimension shorter than 5-1/2" (1" min) cut extension. For longer extension (10-1/2" max) specify (-10).

Siphon jet dims shown.
For blowout dims, use:


□ Min 2" and max 4"

☒ Recommend feet be secured to floor with 1/2" bolts and anchors (by others).

▤ Min 11" and max 16 1/2".

⊗ For siphon jet roughing over 6" or blowout roughing over 12-1/2" specify on order.

⊙ Aux inlet is 5 1/8" offset from vent.

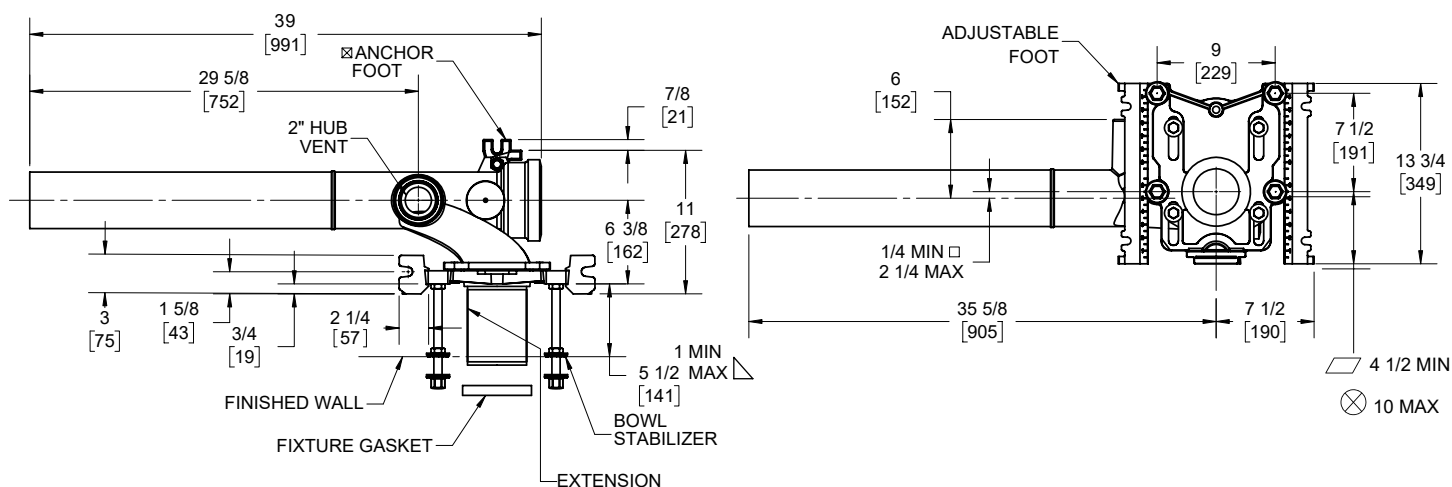

	-XSD	Extra special duty 1,000 LB carrier
	-PF	Pylon foot, std.
	-OR	O-ring carrier
X	-HS	Hub & spigot
	-AUX	Auxiliary inlet (2" no-hub)
	-HUB AUX	Auxiliary inlet (2" hub)
	-VP	Vandal-proof trim
	-1	Positioning frame

	-6	Supply pipe support (specify type of pipe)
	-10	ABS extension through 10-1/2" wall
	-24	Floor mounted back outlet china bowl
	-30	Cast iron adj. extension w/ connector
	-30-2	Cast iron adj. extension w/ connector and test cap
	-32	Carrier for wide chase installations
	-35	Carrier for wheelchair high rough
X	-58	Horizontal no-hub cast long barrel

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

