

# 12714

## Closet Carrier

### Vertical With Right Hand Vent

#### Specification

Josam 12714 series coated cast iron single vertical 4" no-hub fitting with 2" no-hub right-hand offset vent, adjustable carrier body, invertible for siphon jet or blowout closets, with ABS extension with integral test cap, pylon feet, anchor foot, plated hardware and neoprene fixture gasket.




△ For dimension shorter than 5-1/2" (1" min) cut extension. For longer extension (10-1/2" max) specify (-10).

⊗ For siphon jet roughing over 6" or blowout roughing over 12-1/2" specify on order.

Siphon jet dims shown. For blowout dims, use:

☒ Recommend feet be secured to floor with 1/2" bolts and anchors (by others).

△ Min 11" and max 16 1/2" □ Min 15-11/16" and max 18-1/4"

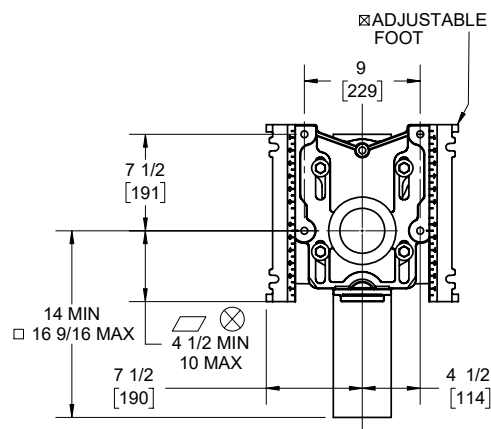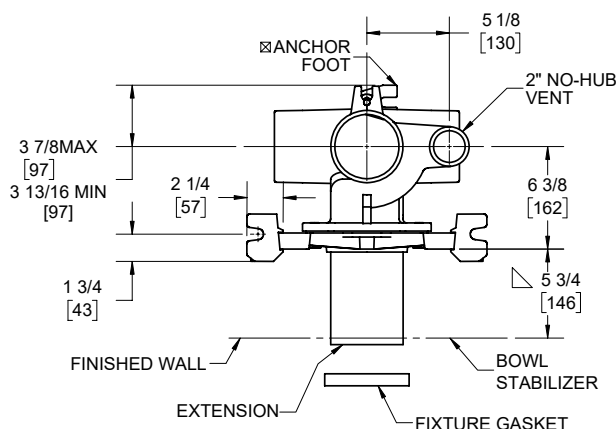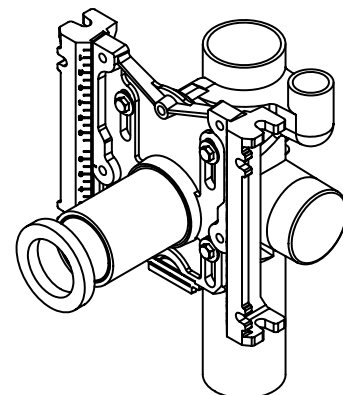

|       |                                     |
|-------|-------------------------------------|
| -PAF  | Prefab adjustable foot              |
| -XSD  | Extra special-duty 1,000 LB carrier |
| -PF   | Pylon foot, std.                    |
| -OR   | O-ring carrier                      |
| -SD   | Special-duty 500 LB carrier         |
| -HS   | Hub & spigot                        |
| LH4   | Left-hand 4" no-hub branch          |
| -HLH4 | Left-hand 4" hub branch             |
| -RH4  | Right-hand 4" no-hub branch         |
| -HRH4 | Right-hand 4" hub branch            |
| -D4   | Double 4" no-hub branches           |
| -HD4  | Double 4" hub branches              |
| -VP   | Vandal-proof trim                   |

|       |                                                    |
|-------|----------------------------------------------------|
| -1    | Positioning frame                                  |
| -6    | Supply pipe support (specify type of pipe)         |
| -10   | ABS extension through 10-1/2" wall                 |
| -24   | Floor mounted back outlet china bowl               |
| -30   | Cast iron adj. extension w/ connector              |
| -30-2 | Cast iron adj. extension w/ connector and test cap |
| -32   | Carrier for wide chase installations               |
| -35   | Carrier for wheelchair high rough                  |
| -49   | No-hub auxiliary inlet, under vent                 |
| -50   | No-hub auxiliary inlet, opposite vent              |
| -53   | Threaded auxiliary inlet, under vent               |
| -54   | Threaded auxiliary inlet, opposite vent            |

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

#### Notes:

