

200-DIS-C

Trench Drain Grate

PRO-PLUS® 200



Specification

Josam 200-DIS-C epoxy-coated, ductile iron slotted grate with center hole for locking bar securement and four point lock. -PS option provides PRO-SNAP® securement (see 200-DIS-C-PS submittal). Designed to fit PRO-PLUS® 200 size channel. Meets ADA and heelproof slot requirements.

Load ratings EN/DIN: C

H20:Y

Note: Free area is 38 SQ. IN. per 1/2 meter grate.

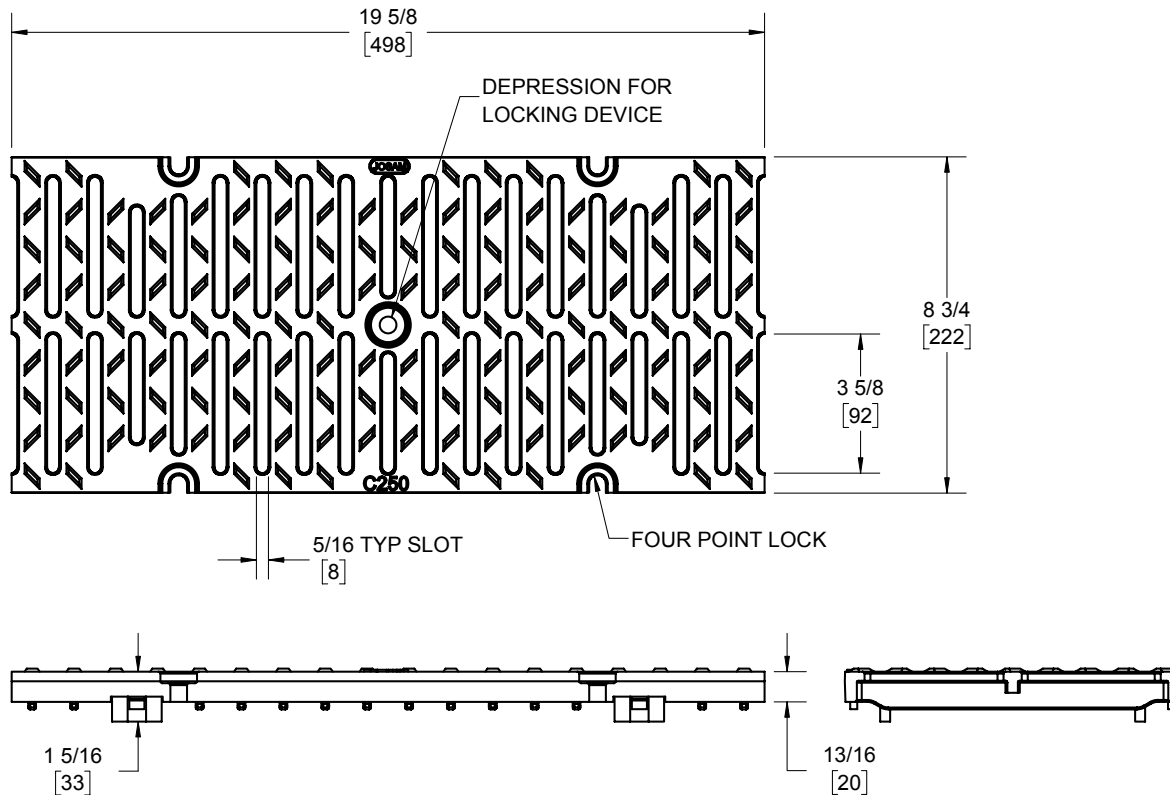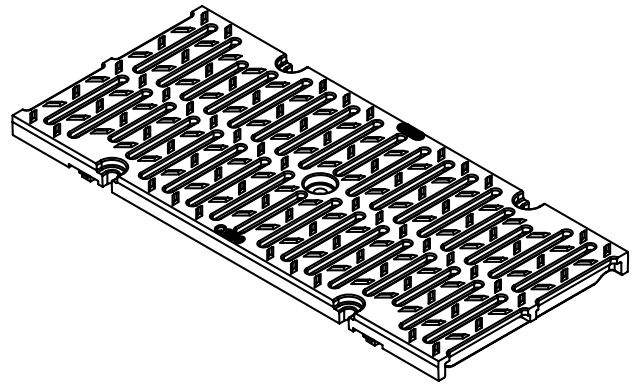

-DC	Made in USA
-GALV	Galvanized coating

Locking bar (order separately)	360142
Bolt down (reqs. DI-Rail) (order separately)	360143

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

