

200-DIS-F

Trench Drain Grate

PRO-PLUS® 200



Specification

Josam 200-DIS-F epoxy-coated, ductile iron slotted grate with center hole for locking bar securement and bolt down lock. -PS option provides PRO-SNAP® securement (see 200-DIS-F-PS submittal). Designed to fit PRO-PLUS® 200 size channel. Meets ADA slot requirements.

Load ratings EN/DIN: F

H20:Y

Note: Free area is 38 SQ. IN. per 1/2 meter grate.

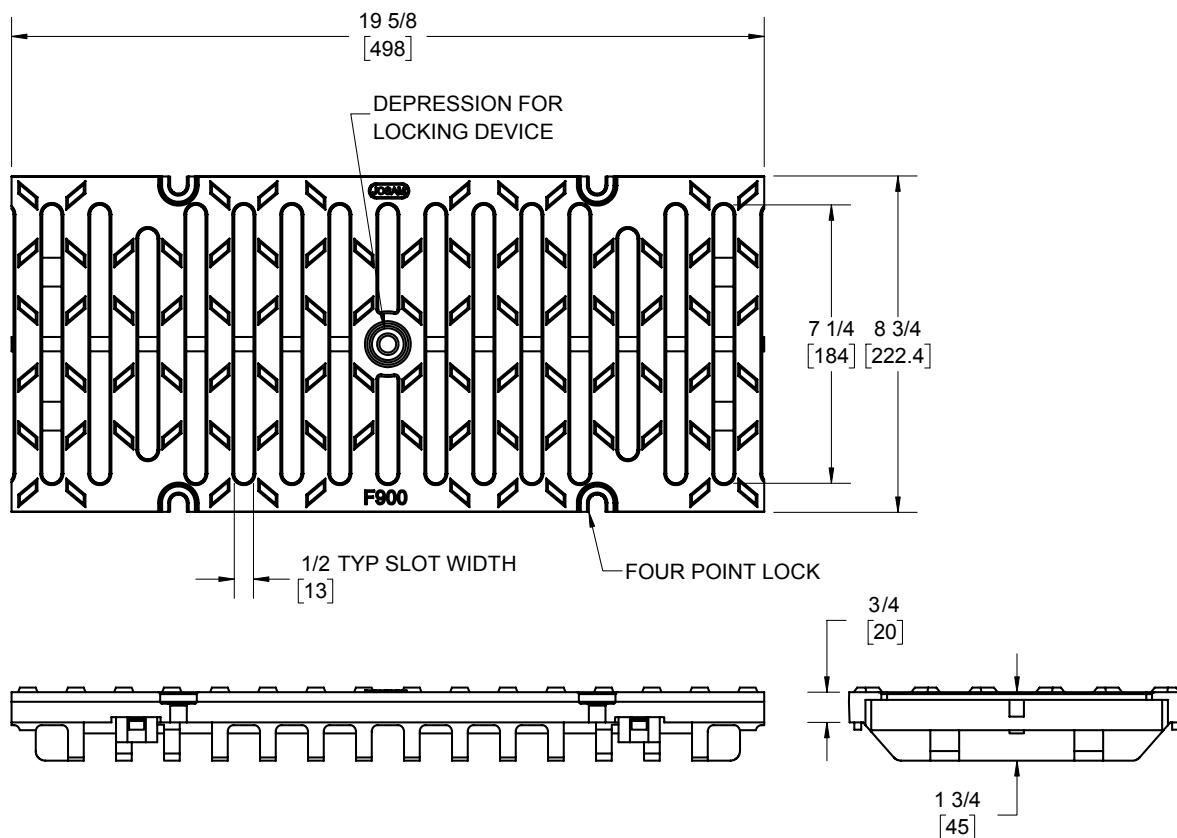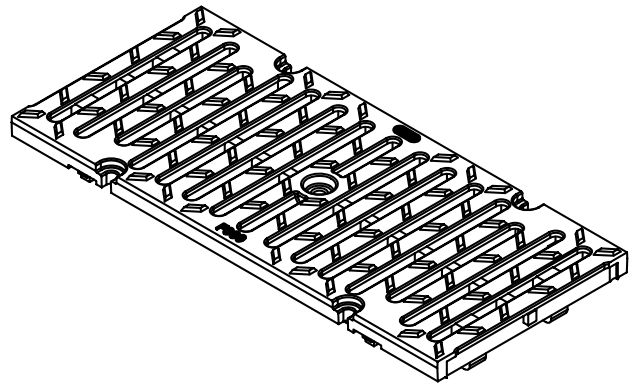

	Made in USA
--	-------------

	Locking bar (order separately)	360142
	Bolt down (order separately)	360143

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

