


21500-AE

Roof Drain

W/ Leveleze® Adjustable Extension

Specification

Josam 21500-AE Series coated cast iron leveleze® roof drain, large polypropylene locking dome, Wejloc® non-puncturing clamp ring with integral gravel stop, bolted support ring, adjustable top, large sump with wide roof flange and bottom outlet.

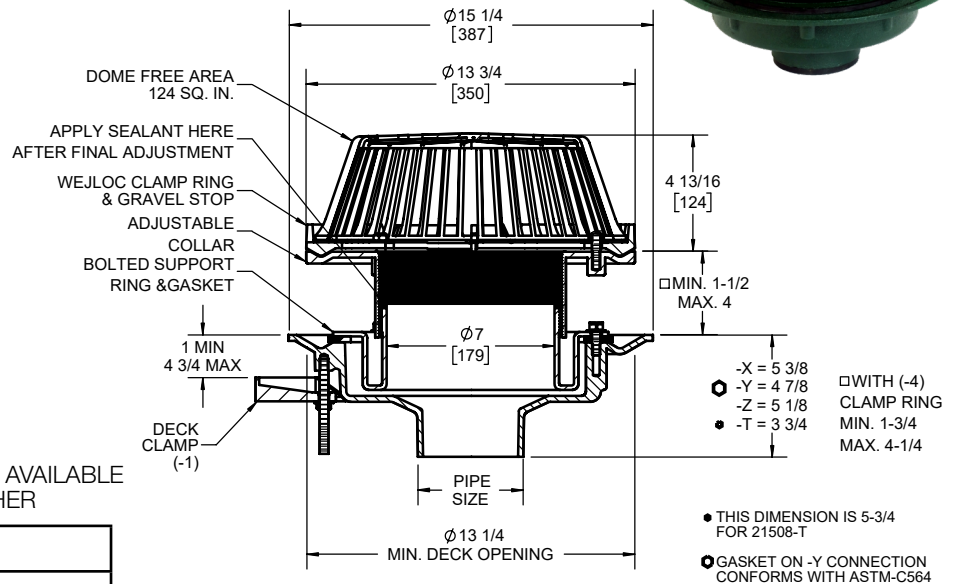

△ SEPARATE SUBMITTAL FOR THIS OPTION AVAILABLE
*-16 & -17 CANNOT BE FURNISHED TOGETHER

	2"	Pipe Size
	3"	Pipe Size
	4"	Pipe Size
	5"	Pipe Size
	6"	Pipe Size
	8"	Pipe Size
	10"	Pipe Size (No-Hub Only)
	-LCH	Longer Clamping Hardware, Up to 2" (PN 030040)
X	-AE	Threaded leveleze® Adj. Ext.
	-CR	Clamping Drain Receiver (Min. Deck Opening Ø 16")
	-VP	Secured Dome
	-1	Deck Clamp Assembly
	-1C	Drain Receiver Clips (Min. Deck Opening Ø 16")
	-2	Drain Receiver
	-3	Deck Clamp Asy. and Drain Receiver
	-3C	Drain Receiver and Drain Receiver Clips
	-4	Secondary Flashing Clamp (-AE Only)
	-6	Extra Wide Flange Drain Body (-x Outlet Only)

	-10	Fixed Ext. Collar, Cast Iron. 4" Std. (Specify Height)
	-10-20	Fixed Ext. Collar, Galvanized. 4" Std. (Specify Height)
△	-16"	Internal Waterguard (2" Thru 8" Outlets Only)
	-17"	2" High Solid Clamping Collar
△	-19	Clamp Collar W/Perf. Stainless Gravel Guard
	-20	Galvanized Cast Iron Parts
	-22	Cast Iron Dome
	-22 -21	Galvanized Cast Iron Dome Only
	-23	Rough Bronze Dome
	-26	Aluminum Dome
	-33	Stainless Steel Mesh-Covered Dome
	-66	No-Hub Side Outlet (2" Thru 6" Outlets Only)
	-T	Threaded Outlet
	-X	Inside Caulk Outlet
	-Y	Hub Outlet W/Gasket (2", 3" & 4" Sizes Only)
	-Z	No-Hub Spigot Outlet

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

