


21500-ORDG1

Roof Drain Green Roof Specification

Josam series 21500-ORDG1 coated cast iron drain body and clamp ring with stainless steel gravel stop and secured cover and pvc standpipe with orifice.

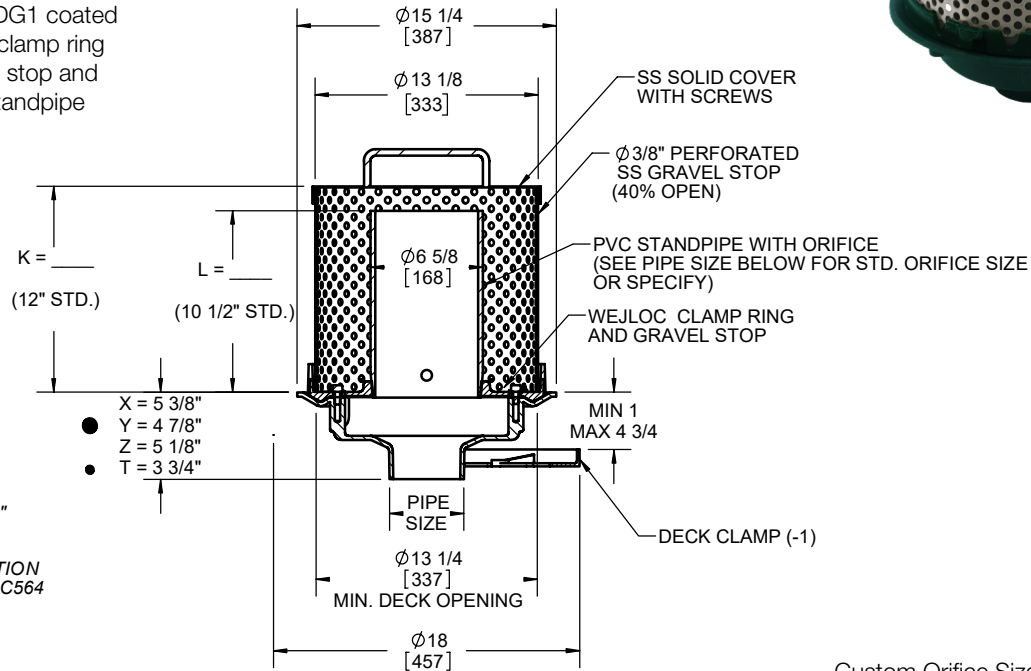

- THIS DIMENSION IS 5-3/4" FOR 21508-T
- GASKET ON -Y CONNECTION CONFORMS WITH ASTM-C564

Custom Orifice Size = ϕ _____"

2"	Pipe Size (Orifice = ϕ 5/8")
3"	Pipe Size (Orifice = ϕ 5/8")
4"	Pipe Size (Orifice = ϕ 5/8")
5"	Pipe Size (Orifice = ϕ 1")
6"	Pipe Size (Orifice = ϕ 1")
8"	Pipe Size (Orifice = ϕ 1")
10"	Pipe Size (No-Hub Only) (Orifice = ϕ 1")
-X	Inside Caulk Outlet
-Y	Hub Outlet W/Gasket (2", 3" & 4" Sizes Only)
-Z	No-Hub Spigot Outlet
-T	Threaded Outlet
-22	Cast Iron Dome
-22-21	Galv. Cast Iron Dome Only
-AE	Threaded Levelzeze Adj. Ext.

-AER	Adj. Ext. Using Threaded Rods
-PC	Perforated Cover
-LO	Less Orifice In Standpipe
-1	Deck Clamp Asy.
-2	Drain Receiver
-3	Deck Clamp Asy. and Drain Receiver
-3C	Drain Receiver and Drain Receiver Clips
-4	Secondary Flashing Clamp (-AE Only)
-6	Extra Wide Flange Drain Body (-X Outlet Only)
-10	Fixed Ext. Collar, Cast Iron (Specify Ht. Or 4" Std.)
-10-20	Fixed Ext. Collar, Galv. (Specify Ht. Or 4" Std.)
-17*	2" High Solid Clamping Collar - *Standpipe Not Available*
-20	Galv. Cast Iron Parts
-66	No-Hub Side Outlet (2" Thru 6" Outlets Only)

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

