


21500-RDG2

Roof Drain Green Roof Specification

Josam series 21500-RDG2 coated cast iron drain body with Wejloc® clamp ring and stainless steel gravel stop with stainless steel cover - optional auxiliary inlet.

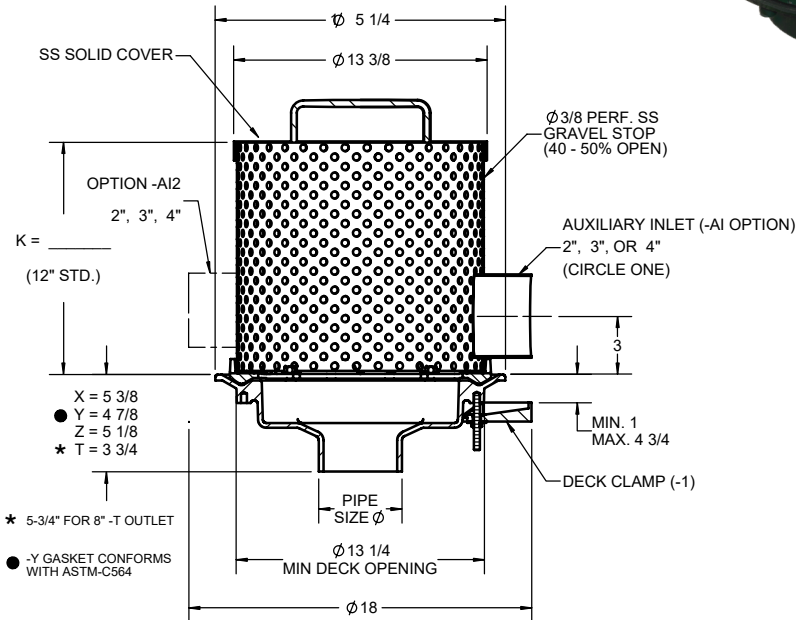

Product is Non-Cancelable and Non-Returnable

Name: _____

Signature: _____

Date: _____

	2"	Pipe Size
	3"	Pipe Size
	4"	Pipe Size
	5"	Pipe Size
	6"	Pipe Size
	8"	Pipe Size
	10"	Pipe Size (No-Hub Only)
	-X	Inside Caulk Outlet
	-Y	Hub Outlet with Gasket (2", 3" & 4" Sizes Only)
	-Z	No-Hub Spigot Outlet
	-T	Threaded Outlet
	-AI	Aux Inlet (Specify Size)
	-AI2	Second Aux Inlet (Specify Size)
	-AE	Threaded Levelze Adj. Ext.

	-AER	Adj. Ext. Using Threaded Rods
	-PC	Perforated Cover
	-1	Deck Clamp Asy.
	-2	Drain Receiver
	-3	Deck Clamp Asy. and Drain Receiver
	-3C	Drain Receiver and Drain Receiver Clips
	-4	Secondary Flashing Clamp (-AE Only)
	-6	Extra Wide Flange Drain Body (-X Outlet Only)
	-10	Fixed Ext. Collar, Cast Iron (Specify Ht. 4" Std)
	-10-20	Fixed Ext. Collar, Galv. (Specify Ht. 4" Std)
	-20	Galv. Cast Iron Parts
	-33	SS Mesh Covered Gravel Stop (16 X 16 Mesh)
	-66	No-Hub Side Outlet (2" Thru 6" Outlets Only)

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

