


21500-RDG3

Roof Drain Green Roof Specification

Josam series 21500-RDG3 coated cast iron drain body and Wejloc® clamp ring with stainless steel gravel stop, secured cover and cast iron dome.

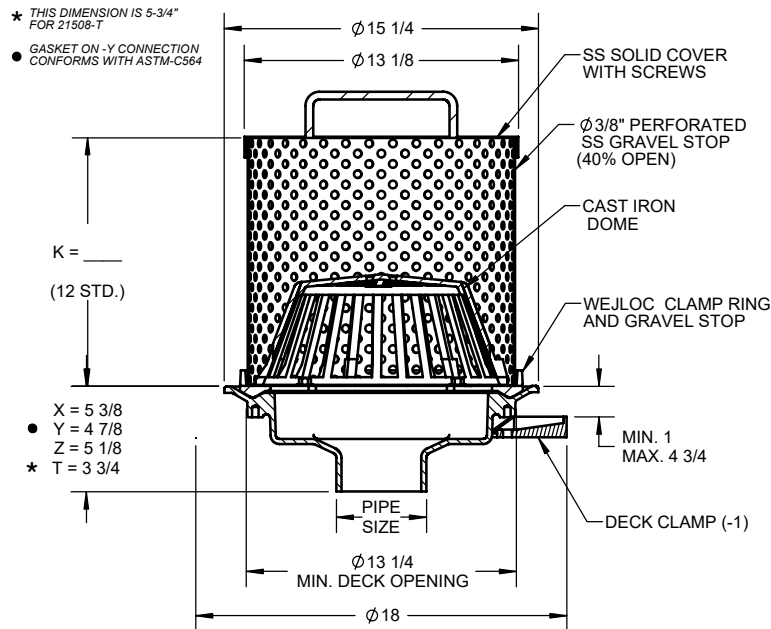

	2"	Pipe Size
	3"	Pipe Size
	4"	Pipe Size
	5"	Pipe Size
	6"	Pipe Size
	8"	Pipe Size
	10"	Pipe Size (No-Hub Only)
	-T	Threaded Outlet
	-X	Inside Caulk Outlet
	-Y	Hub Outlet W/Gasket (2" , 3" & 4" Sizes Only)
	-Z	No-Hub Spigot Outlet
	-22	Cast Iron Dome
	-22-21	Galv. Cast Iron Dome Only
	-23	Rough Bronze Dome
	-26	Aluminum Dome
	-33	Stainless Mech Screen-Covered Dome

	-VP	Vandal-Proof Dome
	-AE	Threaded Levelzeze Adj. Ext.
	-AER	Adj. Ext. Using Threaded Rods
	-PC	Perforated Cover
	-1	Deck Clamp Asy.
	-2	Drain Receiver
	-3	Deck Clamp Asy. And Drain Receiver
	-3C	Drain Receiver And Drain Receiver Clips
	-4	Secondary Flashing Clamp (-AE Only)
	-6	Extra Wide Flange Drain Body (-X Outlet Only)
	-10	Fixed Ext. Collar, Cast Iron (Specify Ht. 4" Std.)
	-10-20	Fixed Ext. Collar, Galv. (Specify Ht. 4" Std.)
	-16	Internal Waterguard (2" Thru 6" Outlets Only)
	-20	Galv. Cast Iron Parts
	-66	No-Hub Side Outlet (2" Thru 6" Outlets Only)

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

