

21500-RDG1


Roof Drain Green Roof Specification

Josam series 21500-RDG1 coated cast iron drain body and Wejloc® clamp ring with stainless steel gravel stop, secured cover and perforated pvc standpipe.



★ THIS DIMENSION IS 5-3/4" FOR 21508-T

● GASKET ON -Y CONNECTION CONFORMS WITH ASTM-C564

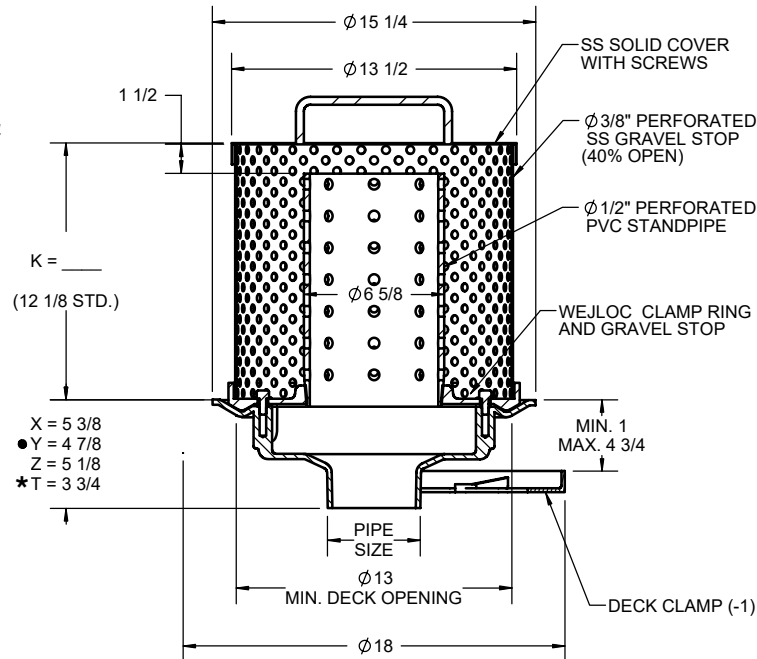

2"	Pipe Size
3"	Pipe Size
4"	Pipe Size
5"	Pipe Size
6"	Pipe Size
8"	Pipe Size
10"	Pipe Size (No-Hub Only)
-X	Inside Caulk Outlet
-Y	Hub Outlet with Gasket (2", 3" & 4" Sizes Only)
-Z	No-Hub Spigot Outlet
-T	Threaded Outlet
-AE	Threaded Levelze Adj. Ext.
-AER	Adj. Ext. Using Threaded Rods

-PC	Perforated Cover
-1	Deck Clamp Asy.
-2	Drain Receiver
-3	Deck Clamp Asy. and Drain Receiver
-3C	Drain Receiver and Drain Receiver Clips
-4	Secondary Flashing Clamp (-AE Only)
-6	Extra Wide Flange Drain Body (-X Outlet Only)
-10	Fixed Ext. Collar, Cast Iron (Specify Ht. 4" Standard)
-10-20	Fixed Ext. Collar, Galv. (Specify Ht. 4" Standard)
-20	Galv. Cast Iron Parts
-33	Stainless Steel Mesh Covered Gravel Stop (16 X 16 Mesh)
-66	No-Hub Side Outlet (2" Thru 6" Outlets Only)

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

