

22080-TSO

Roof Drain

Small Sump, High Dome, Side Outlet Connection

Specification

Josam 22080-TSO series coated cast iron roof drain, beehive dome, Wejloc® non-puncturing clamp ring with integral gravel stop, small sump with roof flange and integral threaded side outlet.



Dome free area: 37.6 SQ. IN.

▼ Separate submittal for this option available.

◆ Gasket on -Y connection conforms with ASTM-C564

** -10 extension 1" standard.

Drain receiver cannot be use with TSO.

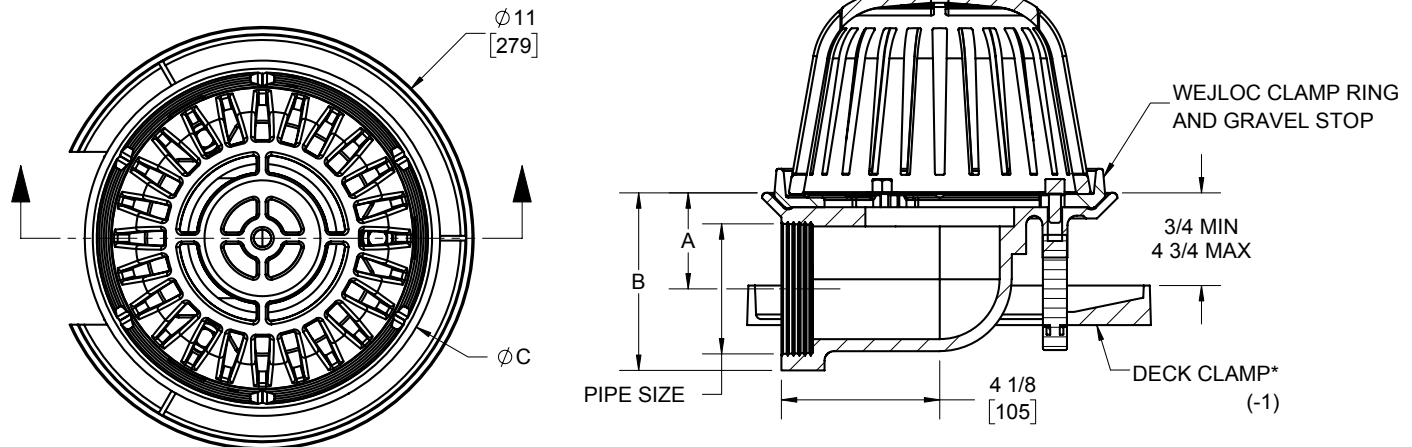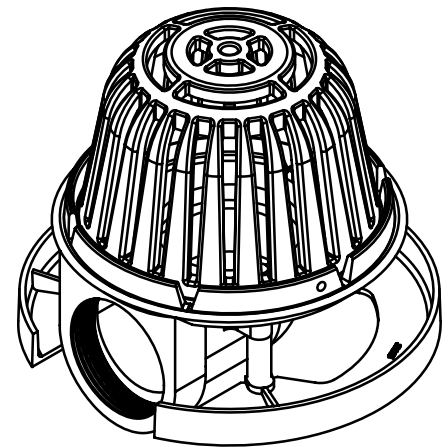

	2"	Pipe size
	3"	Pipe size
	4"	Pipe size
	-1	Deck clamp assembly
	-10	Fixed ext. collar, cast iron (specify height**)
X	-TSO*	Threaded side outlet
	-10-20	▼ Fixed ext. collar, galvanized (specify height**)

	-17	2" high solid clamping collar
	-20	Galvanized cast iron parts
	-21	Galvanized cast iron dome only
	-23	Rough bronze dome
	-33	SS Mesh-covered dome
	-VP	Vandal-proof dome

	Type	Pipe size	A	B	C
	22082-TSO	2"	3	4 5/8	9 1/4
	22083-TSO	3"	2 1/2	4 5/8	9 1/4
	22084-TSO	4"	3 1/4	6	10 1/4

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

