

22080

Roof Drain

Small Sump, High Dome

Specification

Josam 22080 series coated cast iron roof drain, beehive dome, Wejloc® non-puncturing clamp ring with integral gravel stop, small sump with roof flange and bottom outlet.


Dome free area: 37.6 SQ. IN.

▼ Separate submittal for this option available.

*Drain receiver cannot be used with -TSO option.

◆ Gasket on -Y connection conforms with ASTM-C564

** -10 extension 1" standard.

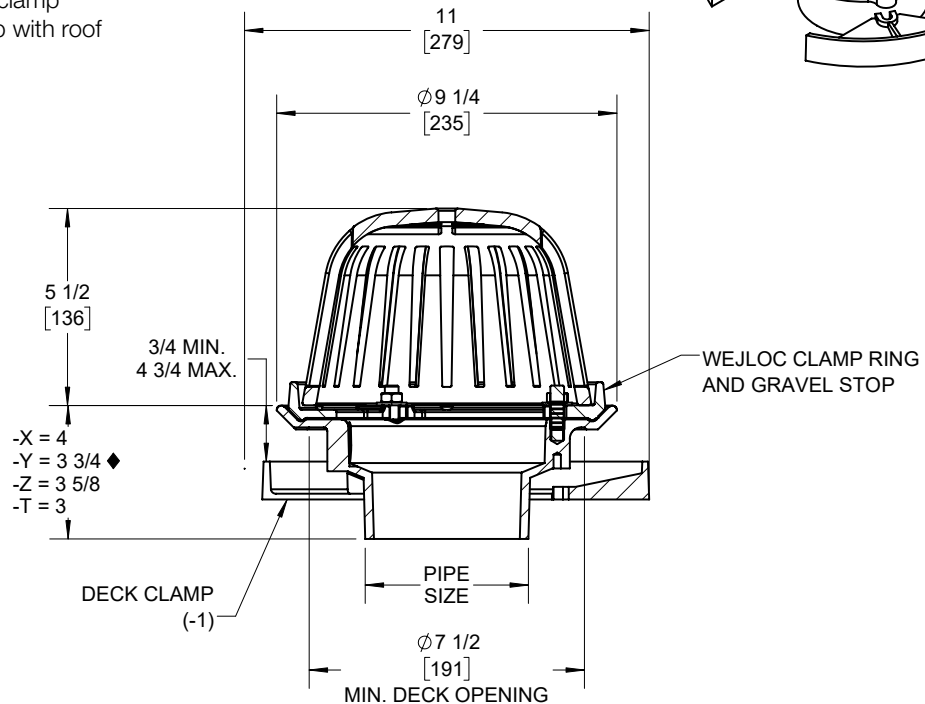

2"	Pipe size
3"	Pipe size
4"	Pipe size
-X	Inside caulk outlet
-Y	Hub outlet with gasket
-Z	No-hub spigot outlet
-T	Threaded outlet
-1	Deck clamp assembly
-2	Drain receiver
-3	Deck clamp assembly and drain receiver
-3C	Drain receiver and drain receiver clips
-10	Fixed extension collar, cast iron (specify height**)

-10-20	Fixed extension collar, galvanized (specify HT**)
-17	▼ 2" High solid clamping collar
-19	Clamp collar with perf SS gravel guard
-20	Galvanized cast iron parts
-21	Galvanized cast iron dome only
-23	Rough bronze dome
-26	Aluminum dome
-33	SS mesh-covered dome
-TSO*	Threaded side outlet
-FG	▼ Flat grate
-VP	Vandal-proof dome

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



A WATTS Brand