

22100-10




Roof Drain

Combination, Fixed Ext.

Specification

Josam 22100-10 series coated cast iron combination roof drain and overflow drain with cast iron dome, Wejloc® non-puncturing clamp ring with integral gravel stop, integral cast iron standpipe in cast iron deck flange and dual no-hub bottom outlets with fixed extension for primary drain. Overflow extended to desired height by others.

Dome free area: 37.6 SQ. IN.

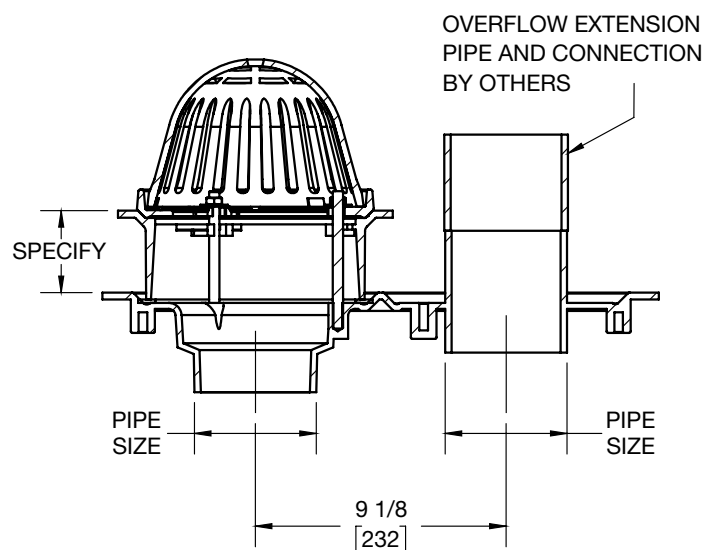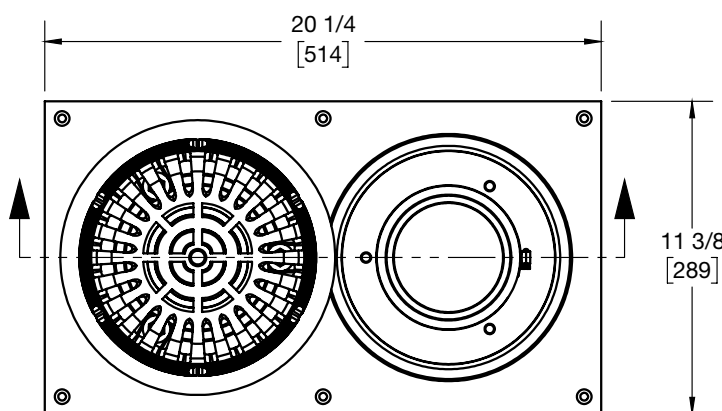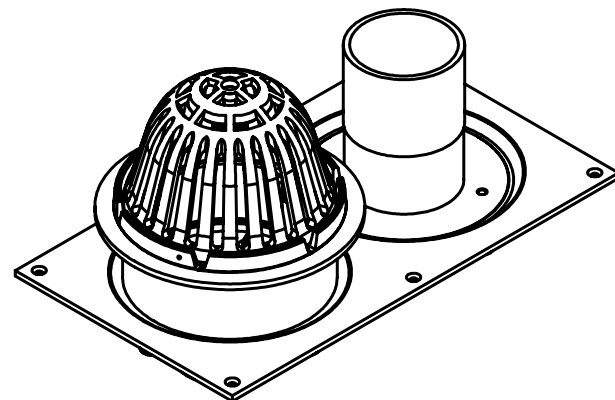

	3"	Pipe size
	4"	Pipe size
	-1	Deck clamp assy
	-19	Perf. SS gravel guard
	-20	Galvanized cast iron parts
	-21	Galvanized cast iron dome only
	-23	Rough bronze dome
	-33	SS mesh screen covered dome
	-VP	Secured dome

Note:

For combination drain with clamp ring and extension for both primary and overflow drains or for similar solution with 2" outlet connections, use 22080-Q5-RCSD-10.

Specify extension height: _____

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



A WATTS Brand