

22500-SS


Stainless Steel Combination Roof Drain

Specification

Josam series 22500-SS stainless steel combination roof drain with stainless steel removable domes, combination drain receiver, and no-hub bottom oulets.

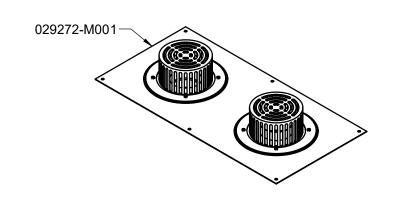



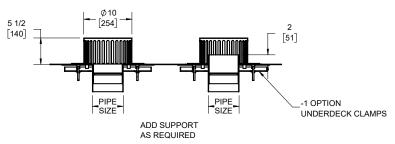

OPTIONS:

-1	Underdeck clamps
-33	Stainless steel mesh covered domes
-VP	Secured domes
-BW	Butt-weld outlet
-PF	Outlet size for Josam push-fit pipe system
-316	316L type material

Pipe Size
2"
3"
4"
6"
8"

Check here for optonal 3" HT.

3" Overflow height

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

(JOSAM[®])

T: (800) 365-6726 • Josam.com A **WATTS** Brand

ES-J-22500-SS 2508 © 2025 Josam