

22500

Roof Drain




Combination Drain/Overflow

Specification

Josam 22500 series coated cast iron 15" diameter combination roof drain and overflow drain, one (1) Wejloc® non-puncturing clamp ring with integral gravel stop, one (1) Wejloc® non-puncturing clamp ring with internal water guard, double drain receiver and clips, and two (2) large polypropylene locking domes.

*10" available in no-hub only.

**10" extensions 4" standard.

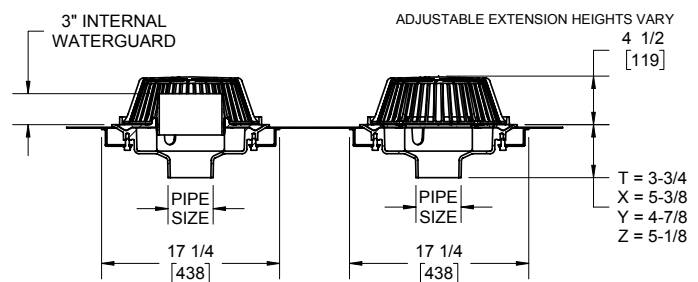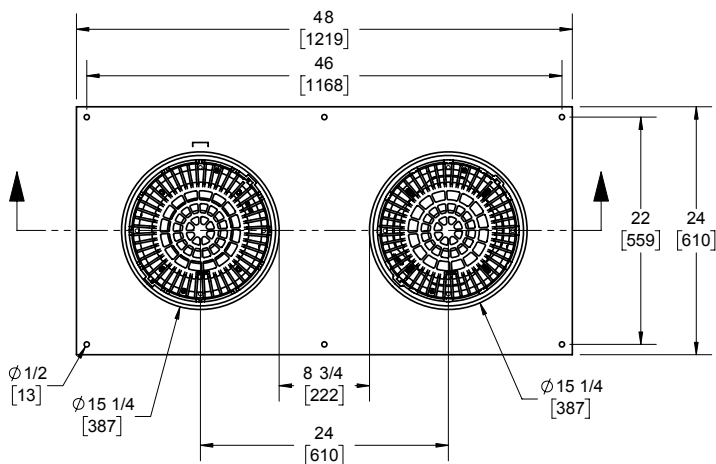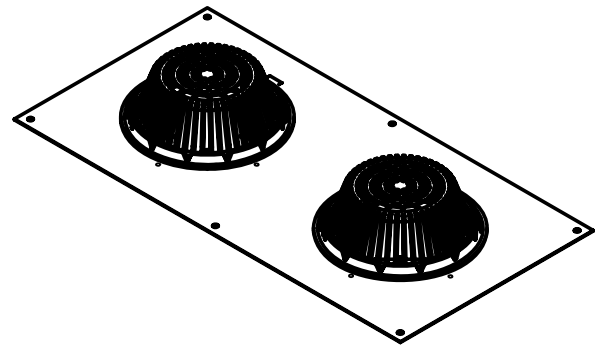

-AE	Threaded Leveze® adj. ext.
-OR	O-ring adjustable extension
-AER	Adjustable extension with rods
-10	Fixed ext. collars, cast iron (specify HT.**)
-19	Clamp collar with perf. SS gravel guard
-20	Galvanized cast iron parts
-21	Galvanized cast iron domes only
-22	Cast iron domes
-23	Rough bronze domes
-26	Aluminum domes
-33	Stainless steel mesh-covered domes

-RCSD	Recessed drain receiver
-1	Deck clamp assembly
-4	Secondary flashing clamp (use with -AE only)
-SC	Solid top cover on overflow dome (-22 only)
-VP	Vandal-proof domes
-IRMA	Perforated stainless steel extensions
-T	Threaded outlet
-X	Inside caulk outlet
-Y	Hub outlet with gasket (2", 3" & 4" sizes only)
-Z	No-hub spigot outlet

Drain

Pipe size
2"
3"
4"
5"
6"
8"
10"

Overflow

Pipe size
2"
3"
4"
5"
6"
8"
10"

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

