

23510

Roof Drain

Extra-Heavy Duty Parking Grate



Specification

Josam 23510 series coated cast iron roof drain, round extra-heavy duty grate set in round secured frame, Wejloc® non-puncturing flashing collar with weepholes for 2" roof fill, large sump with wide roof flange and bottom outlet.

- This dimension is 5 3/4" on 8" threaded outlet.
- Gasket on -Y connection conforms with ASTM-C564
- ⊕ Add 1/4" when furnished with nikaloy or bronze top.

Slot width 1 1/16" SQ. holes.

** -10 extension 4" standard.

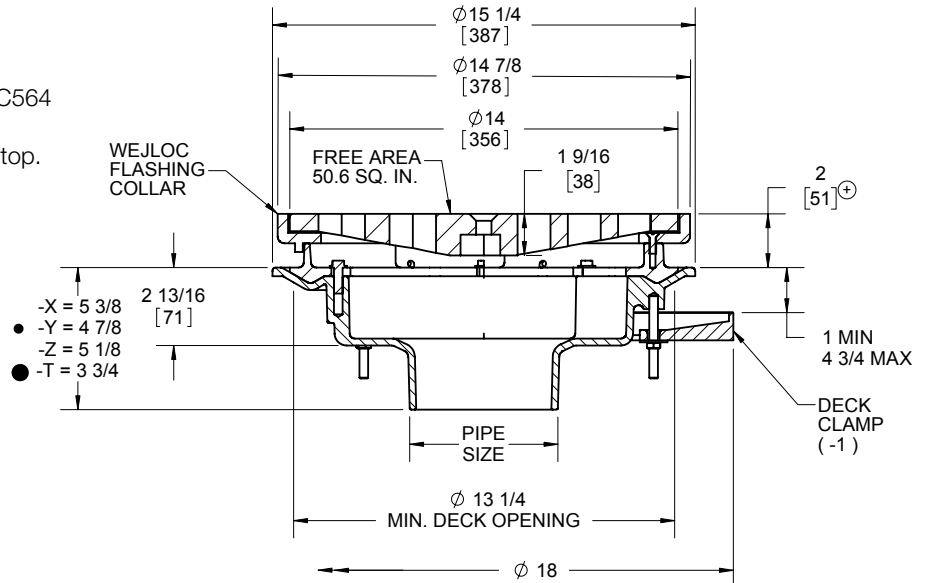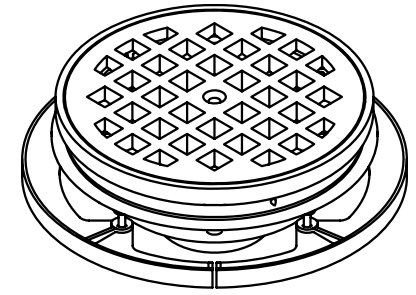

	2"	Pipe size
	3"	Pipe size
	4"	Pipe size
	5"	Pipe size
	6"	Pipe size
	8"	Pipe size
	10"	Pipe size (no-hub only)
	-X	Inside caulk outlet
	-Y	Hub outlet with gasket (2", 3" & 4" sizes only)
	-Z	No-hub spigot outlet
	-T	Threaded outlet
	-CR	Clamping drain receiver (min. deck opening Ø16")

	-1	Deck clamp asy.
	-1C	Drain receiver clips (min. deck opening Ø16")
	-2	Drain receiver
	-3	Deck clamp asy. and drain receiver
	-3C	Drain receiver and drain receiver clips
	-10	Fixed ext. collar, cast iron (specify height**)
	-10-20	Fixed ext. collar, galvanized (specify height**)
	-20	Galvanized cast iron parts
	-36	Ductile iron grate (cast iron top only)
	-50	Satin finish nikaloy top
	-51	Satin finish bronze top
	-VP	Secured grate, vandal-proof screws

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

