



24500-90

Roof Drain



Sill Type With Bronze Grate

Specification

Josam series 24500-90 coated cast iron sill drain, secured low bronze dome, bronze clamp ring and shallow sump with flashing flange and side threaded outlet connection.



**-35
OPTION**

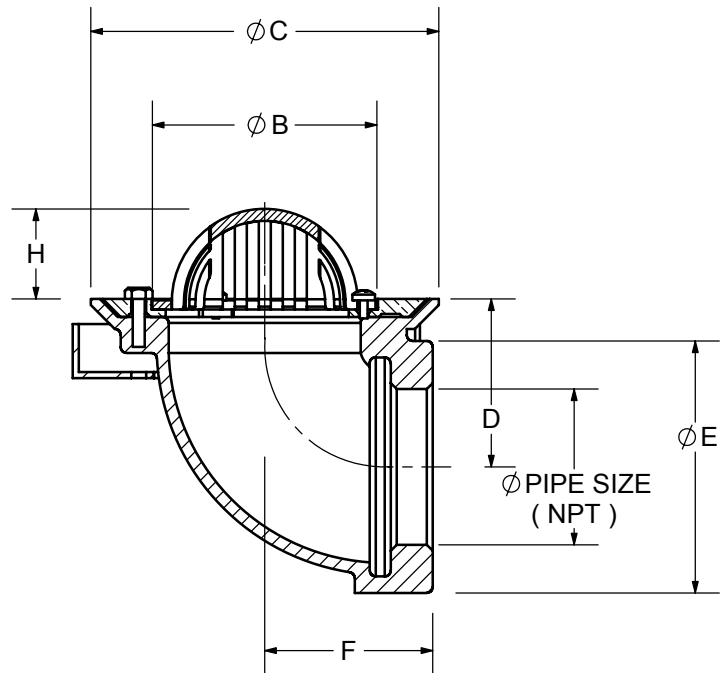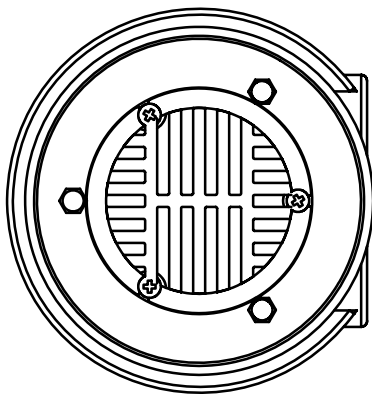

	Pipe size	Ø "B"	Ø "C"	DIM. "D"	DIM. "E"	DIM. "F"	DIM. "H"	Free Area
	2"	3-3/4	6	2-1/2	4	2-3/4	1-1/2	4.4 SQ. IN.
	3"	4-3/4	7-1/4	3	5	3-1/2	1-7/8	7.3 SQ. IN.
	4"	4-3/4	7-1/4	3-1/2	6	3-1/2	1-7/8	7.3 SQ. IN.

X	-90	Threaded outlet body
	-20	Galvanized cast iron parts
	-24	Rough nikaloy dome
	-27	Tall dome
	-33	Stainless steel mesh covered dome

	-35	Flat grate
	-50	Satin finish nikaloy top
	-51	Satin finish bronze top
	-VP	Vandal-resistant dome

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



A WATTS Brand