

24500


Roof Drain

Sill Type With Bronze Dome


Specification

Josam series 24500 coated cast iron sill drain, secured low bronze dome, bronze clamp ring and shallow sump with flashing flange and bottom threaded outlet connection.

▼ Separate submittal for this option available.

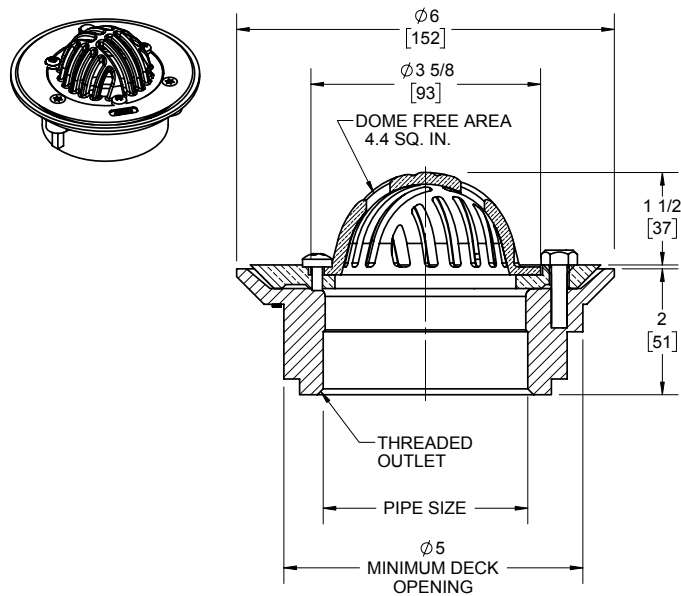

2" & 3" THREADED OUTLET

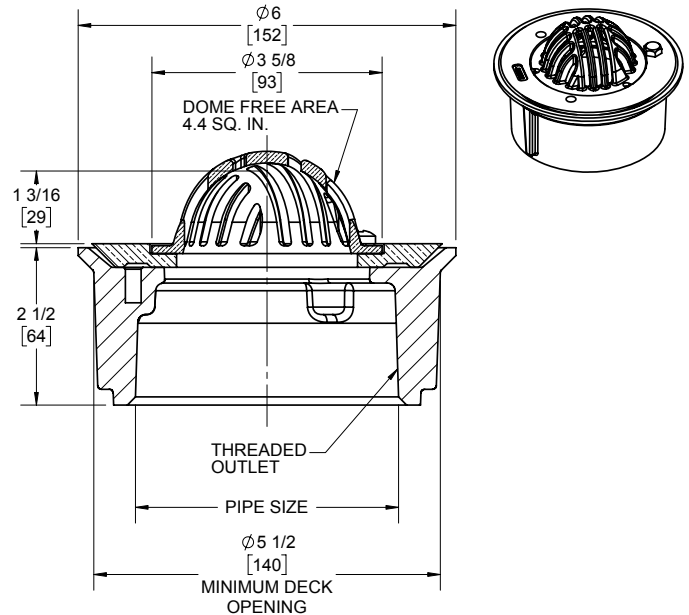

4" THREADED OUTLET

	2"	Pipe size
	3"	Pipe size
	4"	Pipe size
	-20	Galvanized cast iron parts
	-24	Rough nikaloy dome
	-27	▼ High dome
	-33	Stainless steel mesh covered dome

	-35	▼	Flat grate (Slot width 3/16")
	-45	▼	Body with 45° threaded outlet
	-50		Satin finish nikaloy top
	-51		Satin finish bronze top
	-90	▼	Body with 90° threaded outlet
	-VP		Secured dome

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

