

25010-T

Roof Drain

Downspout Nozzle

Specification



Josam 25010-T series cast bronze downspout nozzle, loose wall flange and inlet threaded connection.

* For 2" size, furnished with 3" body and 3" x 2" adapter.

* For 5" size, furnished with 6" body and 6" x 5" adapter.

For ADA compliance, plan connection with pipe so nozzle protrudes maximum 4" from wall.

- Separate submittals for this option available.

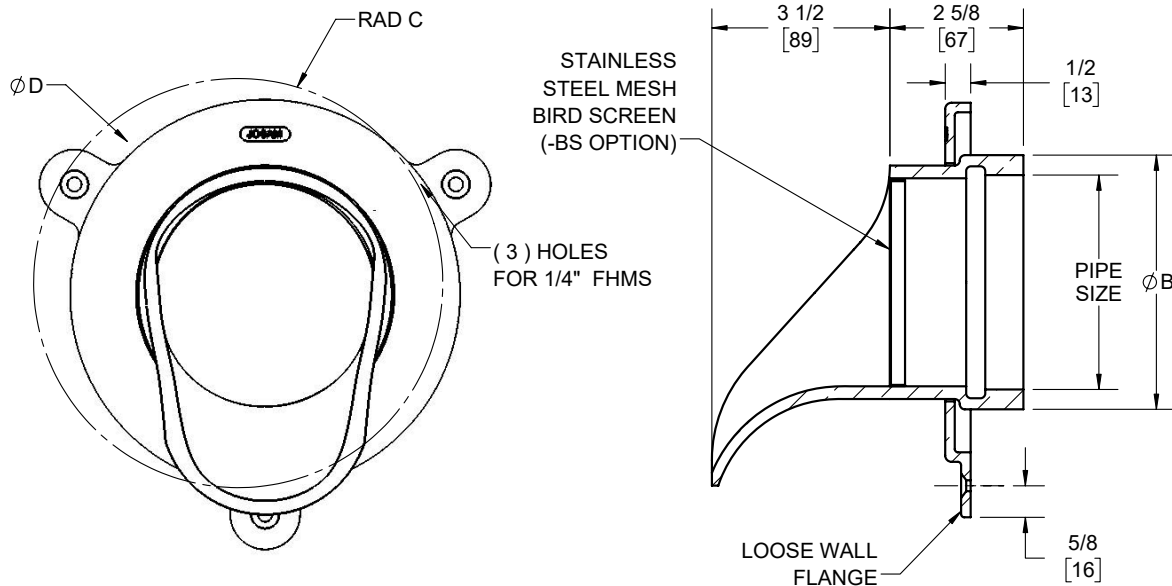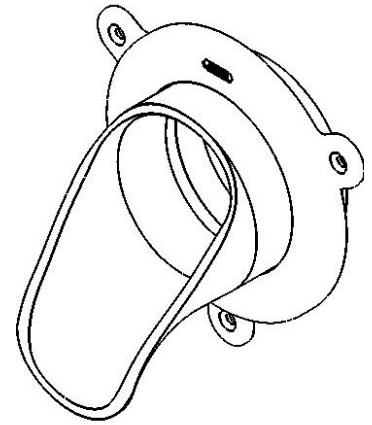

	Type	Pipe Size	B	C	D
	25012-T	2"	4	3 3/8	6
	25013-T	3"	4	3 3/8	6
	25014-T	4"	5	3 7/8	7
	25015-T	5"	7 1/2	4 7/8	9
	25016-T	6"	7 1/2	4 7/8	9
	25018-T	8"	9 5/8	5 7/8	11
	25019-T	10"	11 1/4	6 3/4	12 3/4

	-24	Rough nikaloy (nickel-bronze)
	-51	Satin finish bronze
	-BS	Bird screen
	-PVC	Connects to PVC pipe ●
	-Z	No-hub outlet ●

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

