

30000-A-J-F4

Floor Drain

Adjustable Floor Drain W/ Backwater Valve & Funnel

Specification

Josam 30000-A-J-F4 series cast iron floor drain, two-piece body with double drainage flange & 1/2" primer tap, Wejloc® invertible flashing collar, weepholes, bottom outlet connection, round funnel attached, nikaloy adjustable round Super-Flo® strainer and J backwater valve.

● Gasket on -Y connection conforms with ASTM-C564


▼ Separate submittal for this option available.

Slot width 1/4"

ADJUSTABLE
SUPER-FLO®
STRAINER

WEJLOC®
INVERTIBLE
FLASHING
COLLAR

X = 4
Y = 3-3/4
Z = 3-5/8
T = 3

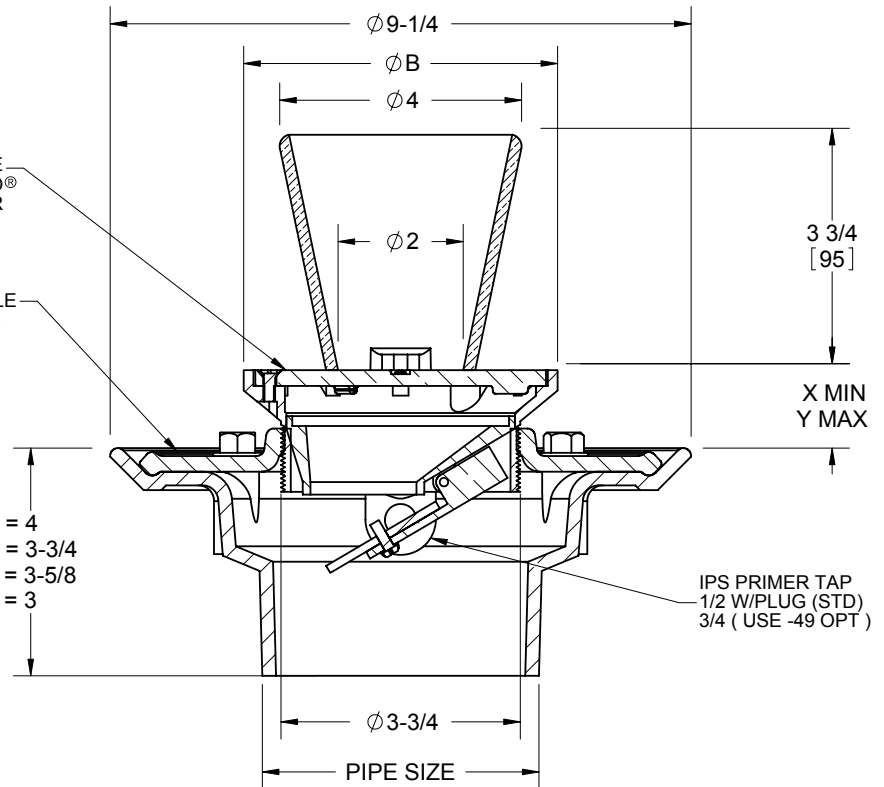

	2"	Pipe size
	3"	Pipe size
	4"	Pipe size
	-TSO	Threaded side outlet
	▼ -ST	With shallow trap (2" & 3" only)
	▼ -PD	Prison drain (2" & 3" only)
	▼ -ARE	Acid resisting epoxy
	-49	3/4 Primer tap
	-91	Rough bronze body
	-92	Galvanized cast iron parts
	-93	Cast iron funnel
	-SS	Stainless steel
	-2	Bronze adjustable strainer & funnel

	-80	Perforated stainless steel basket
	-CP	Chrome plated strainer (5A & 6A)
	-VP	Secured grate, vandal-proof screws
	-T	Threaded outlet
	-X	Inside caulk outlet
	-Y	Hub outlet with gasket
	-Z	No-hub spigot outlet

	Strainer	ØB	Dim. X	Dim. Y	Free area
	-5A	5	3/4	2-1/8	7.8
	-6A	6	1-1/4	2-3/8	11.0
	-7A	7	1-1/8	2-7/8	13.2
	-8A	8	1-5/8	2-5/8	16.2

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

