

30000-E-SS



Floor Drain

Adjustable Floor Drain

Specification

Josam series 30000-E-SS type 316 stainless steel floor drain, two-piece body with double drainage flange and 1/2" primer tap, Wejloc® invertible flashing collar, weepholes, bottom threaded outlet connection and type 304 stainless steel adjustable round strainer with tractor grate.

Slot width 1/2" (TYP).

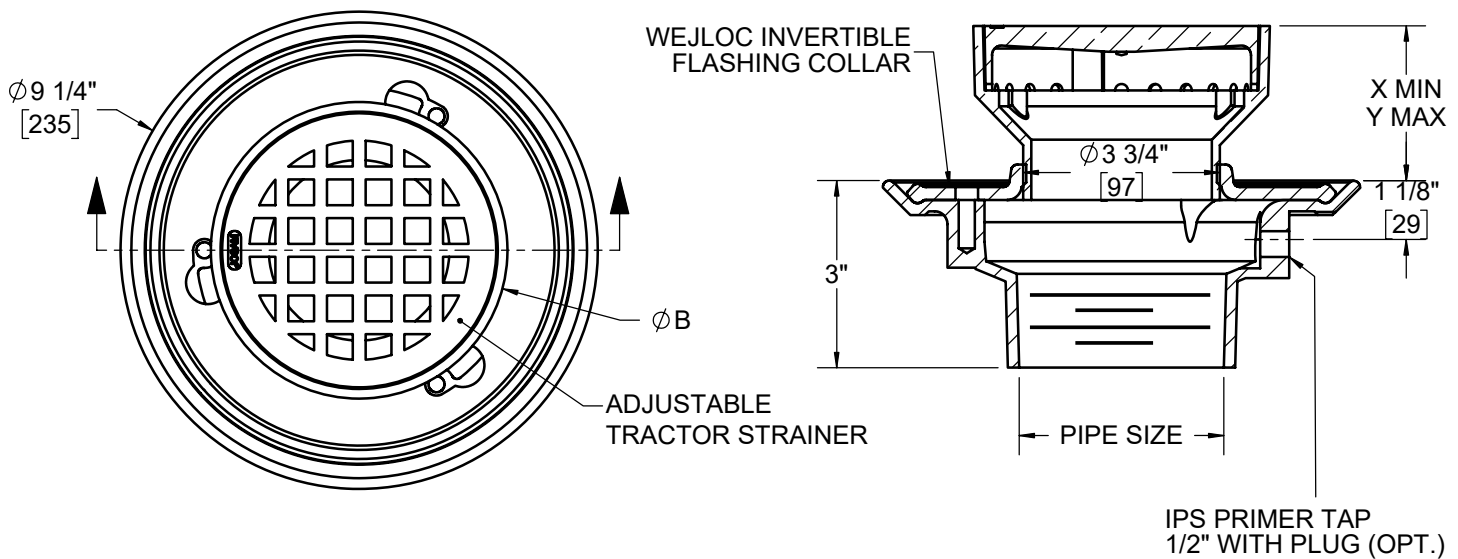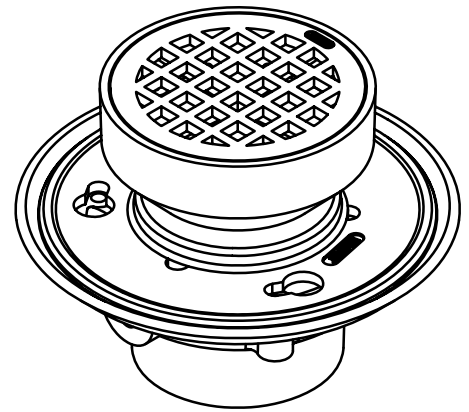

-21	4" Diameter funnel
-22	6" Diameter funnel
-50	1/2" Primer tap
-80	Perforated stainless steel basket
-J	Backwater valve
-VP	Secured grate, vandal-proof screws
-T	Threaded outlet

Strainer	B	X	Y	Free Area
-6E-SS	6	2-1/4	3-1/2	6.7
-7E-SS	7	1-7/8	3-1/8	12.0

2"	Pipe size
3"	Pipe size
4"	Pipe size

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

