

32100-AE-81

Floor Drain

9" Round Top Leveleze[®], Super-Flo[®]

Specification

Josam 32100-AE-81 series coated cast iron Leveleze[®] floor drain, two piece body with double drainage flange, Wejloc[®] non-puncturing flashing collar, weepholes, bottom outlet, adjustable collar with rolled thread and round top with removable sediment bucket that supports a medium-duty loose-set anti-tilting Super-Flo[®] grate with perimeter drainage slots.

Grate free area: 22 IN²



STD. CI slot width: 3/8"

-1 and -2 slot width: 3/16"

Formerly 31120 series.

* Add 1/4" when furnished with
nikaloy or bronze top (-1 or -2).

◆ Conforms with ASTM-C564.

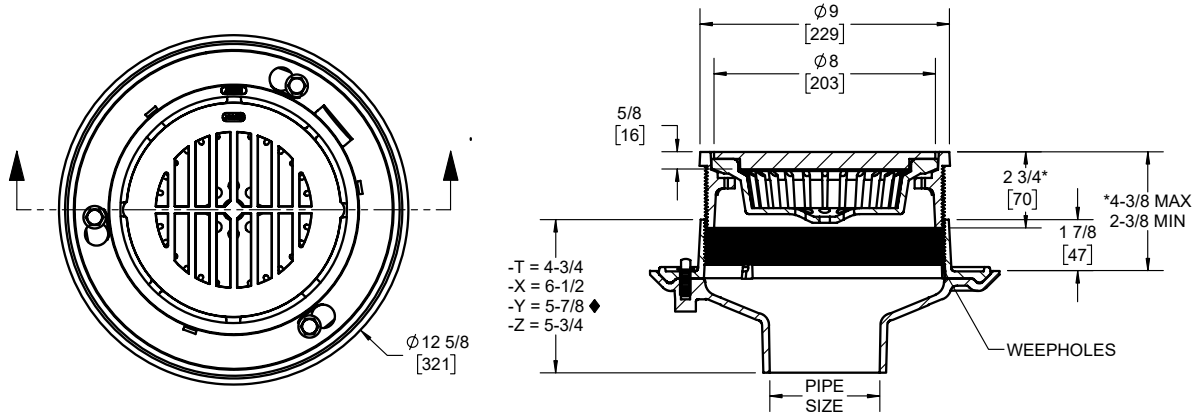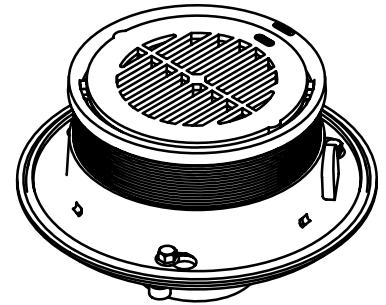

OPTIONS:

X	-AE	Leveleze [®] adjustable extension
X	-81	Slotted cast iron bucket
	-1	Satin finish nikaloy top
	-2	Satin finish bronze top
	-7	Ductile iron grate
	-15	Chained grate
	-VP	Secured grate, VP screws
	-ARE	Acid-resisting epoxy coating
	-49	3/4" primer tap

	-50	1/2" primer tap
	-66	No-hub side outlet
	-84	Stainless steel mesh bucket liner
	-88	Supplementary strainer
	-92	Galvanized cast iron parts
	-T	Threaded outlet
	-X	Inside caulk outlet
	-Y	Hub outlet with gasket
	-Z	No-hub outlet

Pipe size
2"
3"
4"

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

