

32100-AE-LC1-88

Floor Drain

9" Round Top, Locking Cover




Specification

Josam 32100-AE-LC1-88 series coated cast iron floor drain, two-piece body with double drainage flange, Wejloc® non-puncturing flashing collar, weepholes, bottom outlet, round satin nikaloy hinged key-locking cover, adjustable collar and internal strainer.

32100-AE-LC1-88 formerly 39000 series.

32100-AE-LC2-88 formerly 39000-2 series.

◆ Gasket conforms with ASTM-C564

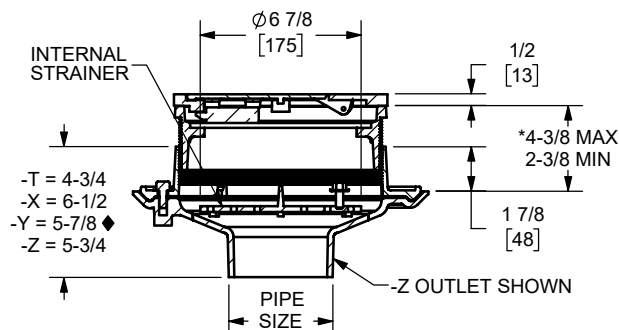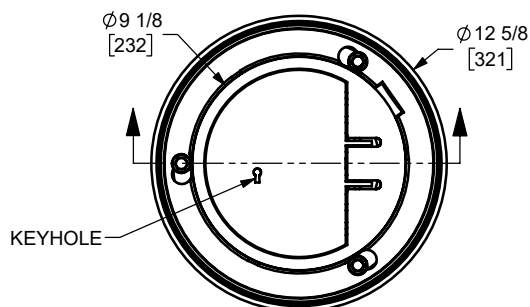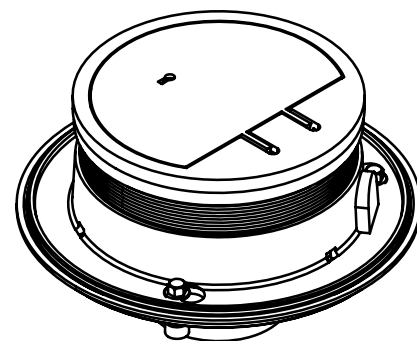

OPTIONS:

	2"	Pipe size
	3"	Pipe size
	4"	Pipe size
X	-AE	Leveleze® adjustable extension
	-81	Slotted cast iron bucket
	-TG	Tractor grate
X	-LC1	Locking cover, satin finish nikaloy
	-LC2	Locking cover, satin finish bronze
	-1	Satin finish nikaloy top
	-2	Satin finish bronze top
	-7	Ductile iron grate
	-11	Extra-heavy grate, cast iron
	-13	Dome grate, cast iron
	-13-1	Dome grate, nikaloy
	-13-2	Dome grate, bronze
	-15	Chained grate

	-39	Solid cast iron cover
	-VP	Secured grate, vandal-proof screws
	-ARE	Acid-resisting epoxy
	-44	Fixed extension collar, cast iron (spec. HT.) 2" STD.
	-44-92	Fixed extension collar, galvanized (spec. HT.) 2" STD.
	-49	3/4" primer tap
	-50	1/2" primer tap
	-84	Stainless steel mesh bucket liner
X	-88	Supplementary strainer
	-92	Galvanized cast iron parts
	-66	No-hub side outlet
	-T	Threaded outlet
	-X	Inside caulk outlet
	-Y	Hub outlet with gasket
	-Z	No-hub outlet

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

