

32100-AE-TG

Floor Drain

9" Round Top, Tractor Grate

Specification

Josam 32100-AE-TG series coated cast iron Leveleze® floor drain, two-piece body with double drainage flange, weepholes, Wejloc® non-puncturing flashing collar, bottom outlet, round top, adjustable collar with machined thread and heavy-duty, deep-set tractor grate.




Slot width - 3/8" (meets ADA).

Free area - 15.7 IN²

* Add 1/4" when furnished with nikaloy or bronze top.

◆ Gasket conforms with ASTM-C564

Formerly 31600 series.

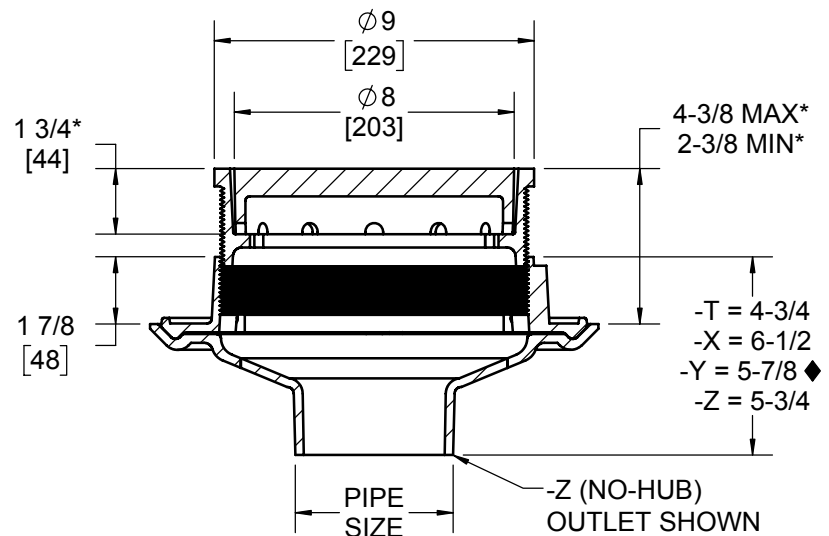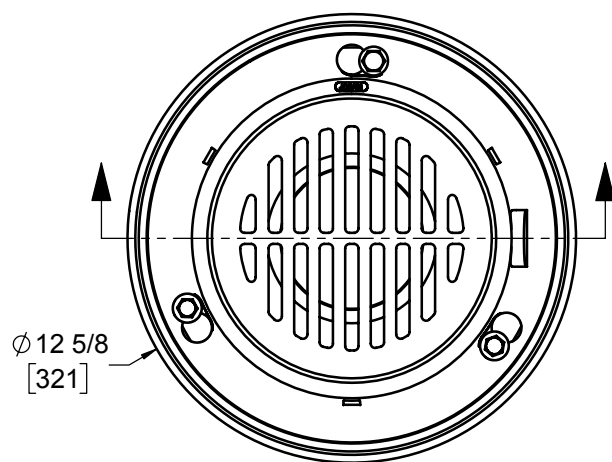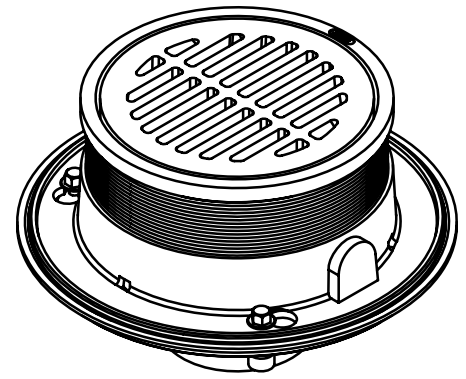

X	-AE	Leveleze® adjustable extension
X	-TG	Tractor grate
	-1	Satin finish nikaloy top
	-2	Satin finish bronze top
	-7	Ductile iron grate
	-15	Chained grate
	-VP	Secured grate, vandal-proof screws
	-ARE	Acid-resisting epoxy
	-49	3/4" primer tap

	-50	1/2" primer tap
	-88	Supplementary strainer
	-92	Galvanized cast iron parts
	-66	No-hub side outlet
	-T	Threaded outlet
	-X	Inside caulk outlet
	-Y	Hub outlet with gasket
	Z	No-hub outlet

Pipe Size
2"
3"
4"

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



A WATTS Brand