

32100-AE

Floor Drain

9" Round Top Leveleze®, Super-Flo®

Specification



Josam 32100-AE series coated cast iron Leveleze® floor drain, two piece body with double drainage flange, Wejloc® non-puncturing flashing collar, weepholes, bottom outlet, round top, adjustable collar with machined thread and medium-duty loose-set anti-tilting Super-Flo® grate with perimeter drainage slots.

Grate free area: 27 IN²
 Std. CI slot width: 3/8"
 (-1 and -2 slot width: 3/16")

Formerly 31100 series.

◆ Gasket conforms with ASTM-C564

* Add 1/4" when furnished with nikaloy or bronze top (-1 or -2)

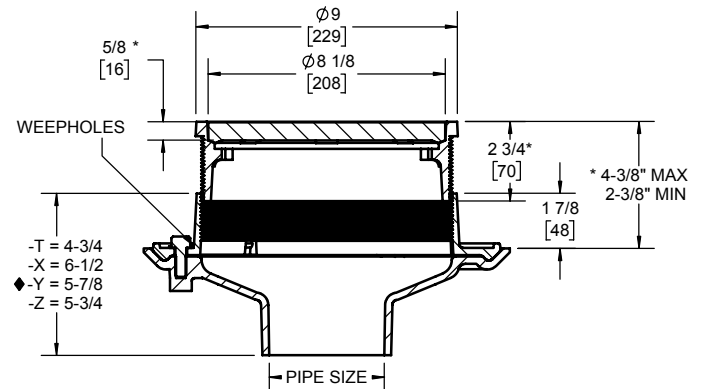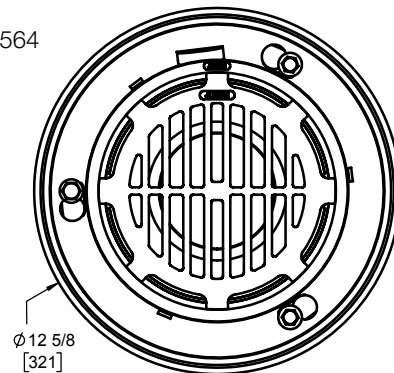

X	-AE	Leveleze® adjustable extension
	-39	Solid cast iron cover
	-TG	Tractor grate
	-HP	Heel-proof grate, CI, 5/16" slot width, 25 SQ in free area
	-1	Satin finish nikaloy top
	-2	Satin finish bronze top
	-7	Ductile iron grate
	-11	Extra heavy-duty grate, cast iron
	-13	Dome grate, cast iron
	-13-1	Dome grate, nikaloy
	-13-2	Dome grate, bronze
	-15	Chained grate

	-VP	Secured grate, VP screws
	-ARE	Acid-resisting epoxy coating
	-49	3/4" primer tap
	-50	1/2" primer tap
	-66	No-hub side outlet
	-81	Slotted cast iron bucket
	-88	Supplementary strainer
	-92	Galvanized cast iron parts
	-T	Threaded outlet
	-X	Inside caulk outlet
	-Y	Hub outlet with gasket
	-Z	No-hub outlet

Pipe Size
2"
3"
4"

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



A WATTS Brand