

32100-SS

Floor Drain

9" Round Top, Stainless Steel

Specification



Josam 32100-SS series type 316L cast stainless steel floor drain, double drainage flange, weepholes, round top, heavy-duty loose-set anti-tilting Super-Flo® grate with perimeter drainage slots, bottom outlet, butt-weld connection for schedule 40 pipe.

Slot width: 15/32"

Grate free area: 26.5 SQ. IN.

Formerly 54230 series.

△ Separate submittal for this option available.

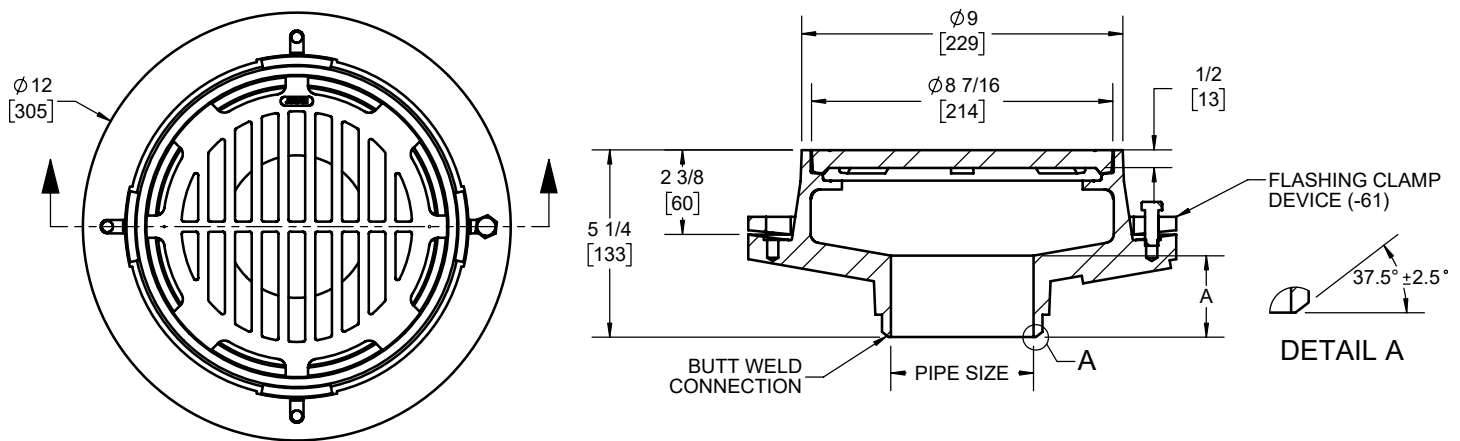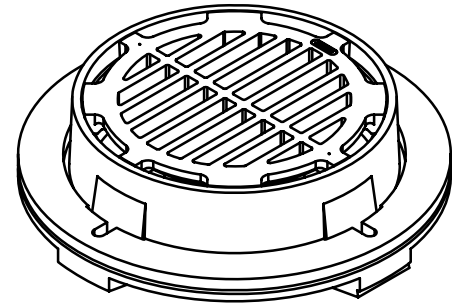

Product is non-cancellable
and non-returnable

Name: _____ Signature: _____ Date: _____

-AE	△ Leveleze® adjustable extension
-81	△ Slotted SS bucket
-8	Solid cover
-9	SS mesh on underside of grate
-21	4" square fabricated funnel (316 SS)
-22	6" square fabricated funnel (316 SS)

-23	9" x 3" rectangular fabricated funnel (316 SS)
-25	Type 304 SS recessed closure plug
-26	Molded ABS recessed closure plug
-34	"T" handle for recessed plug
-61	Flashing clamp device
-69	Schedule 10S butt weld connection

Pipe size	A
2"	1-7/8"
3"	2-5/16"
4"	2-1/2"

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

