

32100-TG

Floor Drain

9" Round Top, Tractor Grate

Specification

Josam 32100-TG series coated cast iron floor drain, two-piece body with double drainage flange, weepholes, Wejloc® non-puncturing flashing collar, bottom outlet, round top with heavy-duty, loose-set tractor grate.



Slot width - 3/8" (Meets ADA)

Free area - 15.7 IN²

Formerly 36000 series.

*Add 1/4" when furnished with nikaloy or bronze top (-1, -2 or -SS-LAM).

◆ Gasket conforms with ASTM-C564

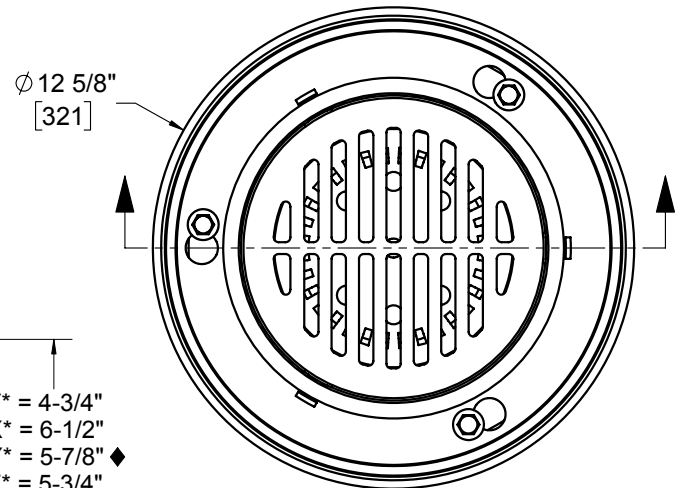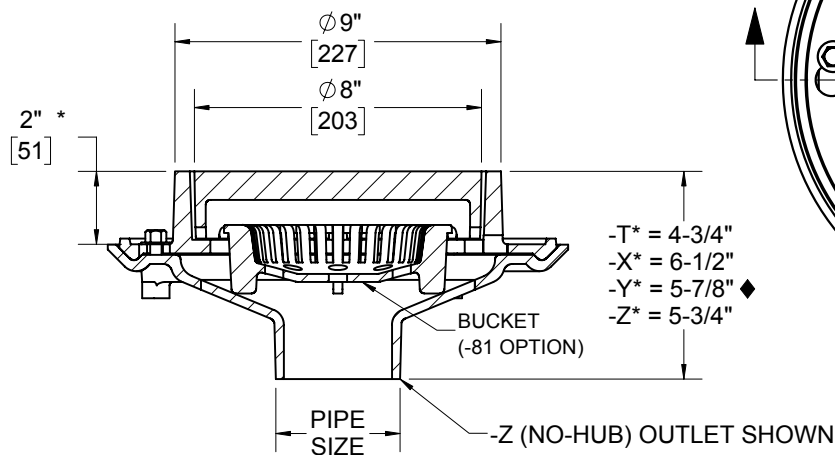

X	-TG	Tractor grate
	-1	Satin finish nikaloy top
	-2	Satin finish bronze top
	-7	Ductile iron grate
	-15	Chained grate
	-VP	Secured grate, vandal-proof screws
	-ARE	Acid-resisting epoxy
	-44	Fixed extension, cast iron (6" STD. or specify height)
	-44 -92	Fixed extension, galvanized (6" STD. or specify height)

	-49	3/4" primer tap
	-50	1/2" primer tap
	-66	No-hub side outlet
	-81	Slotted cast iron bucket (069447)
	-84	Stainless ST. mesh bucket liner
	-88	Supplementary strainer
	-92	Galvanized cast iron parts
	-SS-LAM	Stainless steel laminate - heel proof

Pipe Size
2"
3"
4"

	Outlet Type	
	-T	Threaded
	-X	Inside Caulk
	-Y	Hub with gasket
	-Z	No-hub

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

