

32106-AE-81

Floor Drain

9" Round Top, 6" Outlet Leveleze®, Super-Flo®

Specification




Josam 32106-AE-81 series coated cast iron Leveleze® floor drain, two piece body with double drainage flange, non-puncturing flashing collar, weepholes, 6" no-hub bottom outlet, adjustable collar and round top with removable sediment bucket that supports a medium-duty loose-set anti-tilting Super-Flo® grate with perimeter drainage.

Grate free area: 22 IN²

STD. CI slot width: 3/8"

-1 and -2 slot width: 3/16"

*Add 1/4" when furnished with nikaloy or bronze top (-1 or -2).

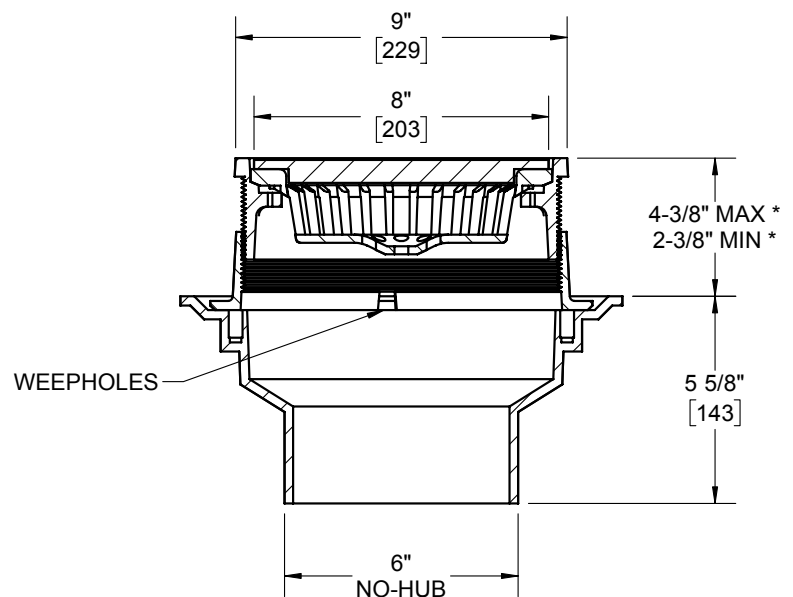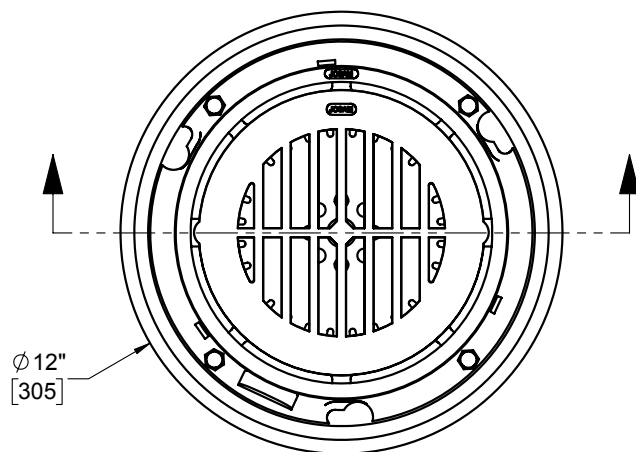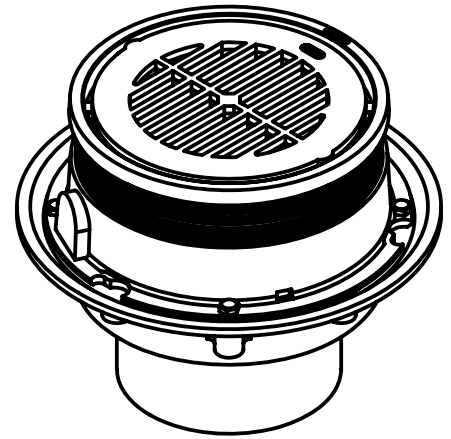

X	-AE	Leveleze® adjustable extension
X	-81	Slotted cast iron bucket
	-1	Satin finish nikaloy top
	-2	Satin finish bronze top
	-7	Ductile iron grate
	-15	Chained grate
	-VP	Secured grate, VP screws

	-ARE	Acid-resisting epoxy coating
	-49	3/4" primer tap
	-50	1/2" primer tap
	-84	Stainless steel mesh bucket liner
	-88	Supplementary strainer
	-92	Galvanized cast iron parts
X	-Z	No-hub outlet

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



A WATTS Brand