

32160-62

Floor Drain

9" Round Tractor Top With Plug

Specification



Josam 32160-62 series coated cast iron floor drain with double drainage flange, Wejloc® collar, weep-holes, bottom outlet, inside caulk connection, round top, heavy-duty loose-set tractor grate, and closure plug with "T" handle.

Slot width 3/8"

Meets ADA.

Grate free area: 15 SQ. IN.

☐ Add 1/4" when furnished with nikaloy or bronze top.

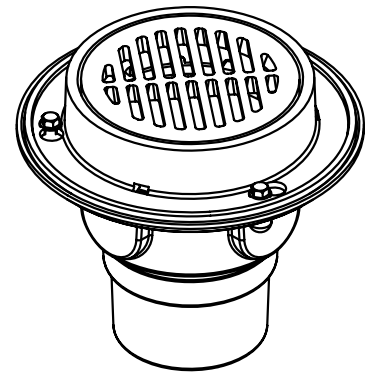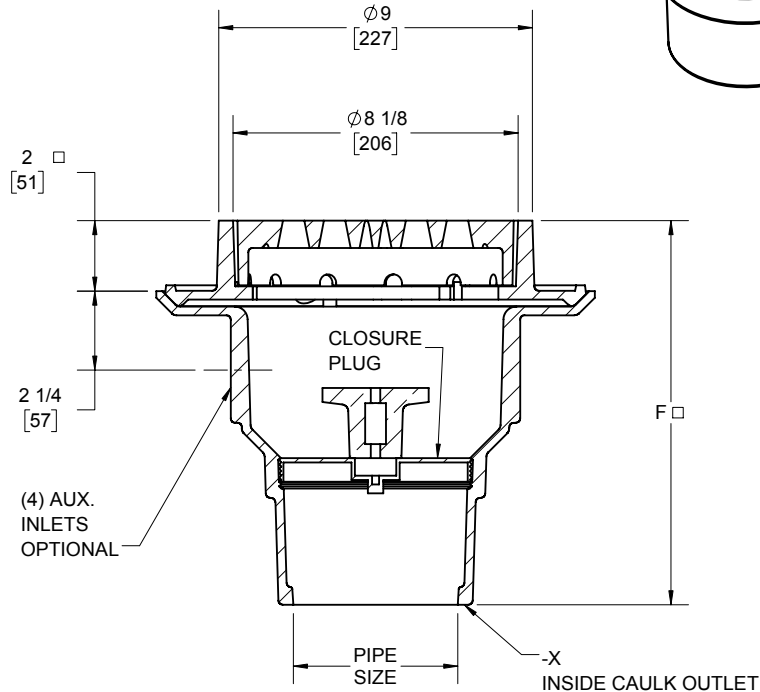

	3"	Pipe size ("F" DIM. = 10 - 7/8")
	4"	Pipe size ("F" DIM. = 11 - 1/4")
	-7	Ductile iron grate
	-12	Square top, cast iron
	-15	Chained grate
	-19	Cast iron undergrate w/satin finish nikaloy top
	-44	Fixed extension collar (3" STD. or specify HT.)
	-49	3/4" primer tap
	-50	1/2" primer tap
	-51	1-1/2" auxiliary threaded inlet
	-52	2" auxiliary threaded inlet

	-53	2" auxiliary hub inlet
	-54	2" auxiliary spigot inlet
	-53-92	2" auxiliary hub inlet, galvanized
	-54-92	2" auxiliary spigot inlet, galvanized
	-66	No-hub side outlet
	-92	Galvanized cast iron parts
	-TSI	Trap seal insert
	-92	Galvanized cast iron parts
	-ARE	Acid resistant epoxy coating
	-VP	Secured grate, vandal-proof screws
X	-X	Inside caulk outlet

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

