

32200-AE-44-SD

Floor Drain

12" Round Top, Adjustable, Secondary Clamp

Specification

Josam 32200-AE-44-SD series coated cast iron Leveleze® floor drain with round top, grate support collar with double drainage flange and weepholes, bottom outlet, adjustable collar, support ring, secondary flashing clamp with weepholes, large sump body and special-duty loose-set anti-tilting grate.

Slot width: 1/2"



Free area: 34.3 IN²

(-1 and -2 slot width: 1/4")

☐ Add 1/4" when furnished with nikaloy or bronze top.

☐ Gasket on -Y outlet conforms with ASTM-C564.

☒ For 8" -T outlet, DIM. is 5-3/4".

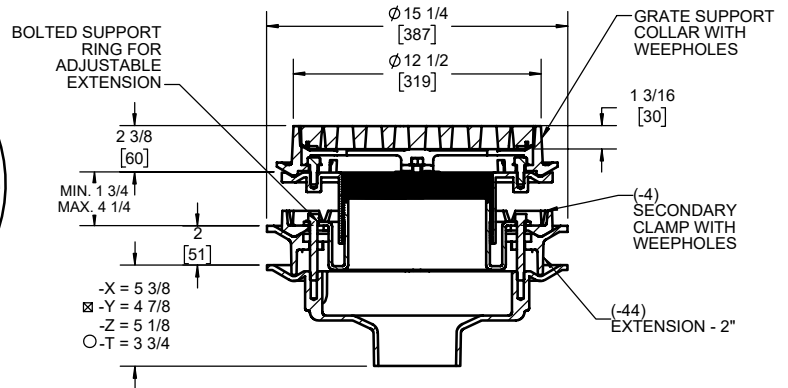

OPTIONS:

X	-AE	Leveleze® adjustable extension
	-81	Slotted cast iron bucket
X	-SD	Special-duty grate
	-1	Satin nikaloy top
	-2	Satin bronze top
	-4	Secondary flashing clamp
	-7	Ductile iron grate
	-13	Dome grate, cast iron
	-13-1	Dome grate, nikaloy
	-13-2	Dome grate, bronze
	-15	Chained grate
	-ARE	Acid-resisting epoxy
	-VP	Secured grate

X	-44	Fixed ext, CI (2" STD. or spec. HT.)
	-44-92	Fixed ext, galv (2" STD. or spec. HT.)
	-49	3/4" primer tap
	-50	1/2" primer tap
	-66	No-hub side outlet (2" - 6")
	-84	SS mesh bucket liner (with -81)
	-88	Supplementary strainer
	-92	Galvanized cast iron parts
	-T	Threaded outlet
	-X	Inside caulk outlet
	-Y	Hub outlet w/ gasket (2" - 4")
	-Z	No-hub outlet

	Pipe size
	2"
	3"
	4"
	5"
	6"
	8"

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



A WATTS Brand