

32200-HP

Floor Drain

12" Round Top, Super-Flo®

Specification


Josam 32200-HP series coated cast iron floor drain, shallow two-piece body with double drainage flange, Wejloc® non-puncturing flashing collar, weepholes, bottom outlet, round top, medium-duty loose-set anti-tilting Super-Flo® grate with perimeter drainage slots.

☐ Add 1/4" when furnished with nikaloy or bronze top.

☒ 5-3/4" height for 8" threaded (-T) outlet.

Gasket for -Y and -X outlets conforms to ASTM-C564

△ Separate submittal available for this option.

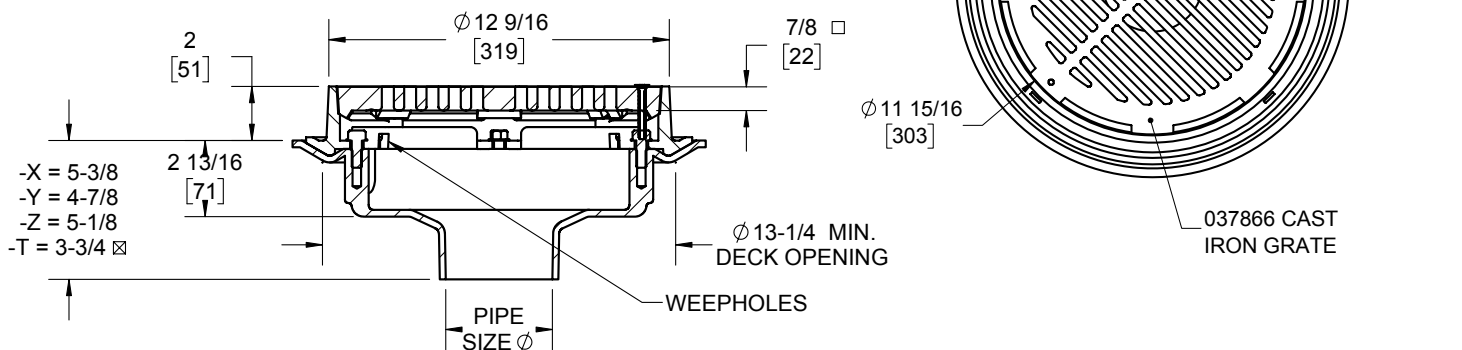

-1	Satin finish nikaloy top
-2	Satin finish bronze top
△ -4	Secondary flash. Clamp (W/ -AE only)
-7	Ductile iron grate
-13	Dome grate, cast iron
-13-1	Dome grate, nikaloy
-13-2	Dome grate, bronze
-15	Chained grate
-44	Fixed extension, CI (2" STD or specify)
-44-92	Fixed extension, galvanized
-49	3/4" Primer tap
-50	1/2" Primer tap
-66	No-hub side outlet (2" - 6")

△ -81	Slotted cast iron bucket
-84	SS mesh bucket liner (must spec. -81)
-88	Supplementary strainer
-92	Galvanized cast iron parts
-AE	Leveze® adjustable extension
-ARE	Acid-resistant epoxy coating
△ -SD	Special-duty grate
X -HP	Heel-proof grate, CI, 5/16" slot width, 25 SQ in free area
-VP	Secured grate, VP screws
-T	Threaded outlet
-X	Inside caulk outlet
-Y	Hub outlet w/gasket (2"-4" sizes only)
-Z	No-hub outlet

Pipe Size
2"
3"
4"
5"
6"
8"

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

