


34710

Floor Drain

Extra Heavy-Duty Top

Specification

Josam 34710 series coated cast iron floor drain with two piece body, Wejloc® non-puncturing flashing clamp collar with double drainage flange, weepholes, bottom outlet, round top and extra heavy-duty loose-set grate.

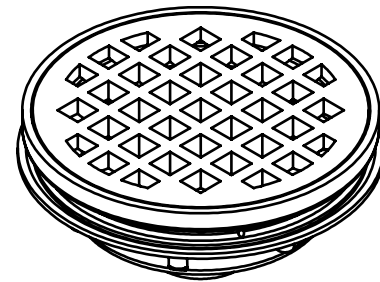


Slots 1-3/16" SQ.

Formerly 36410 series.

☒ This dimension is 5-3/4 on 8" threaded outlet.

◆ Gasket conforms with ASTM-C564

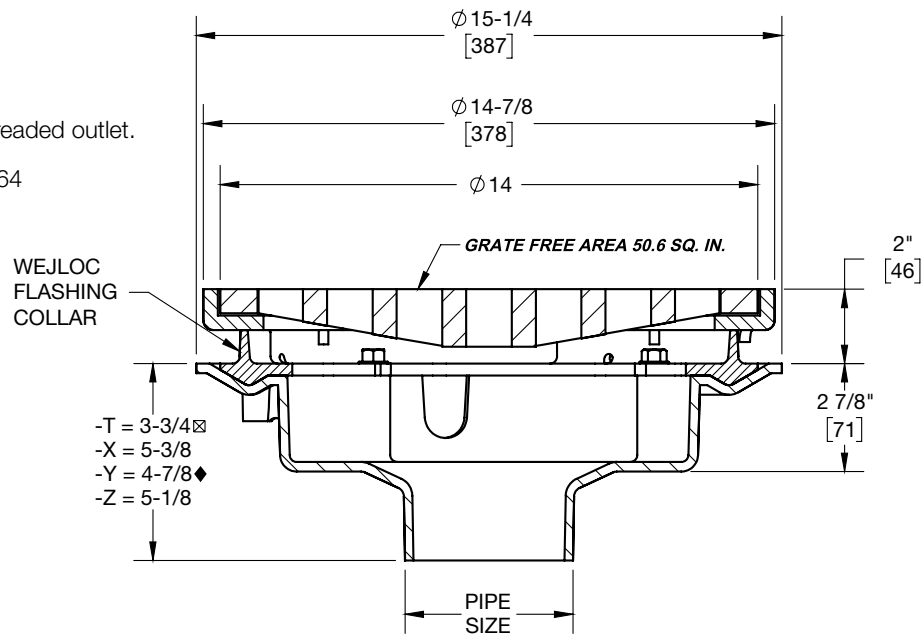

	2"	Pipe size
	3"	Pipe size
	4"	Pipe size
	5"	Pipe size
	6"	Pipe size
	8"	Pipe size
	-AE	Leveze® adjustable extension
	-ARE	Acid resisting epoxy
	-VP	Secured grate
	-TSI	Trap seal insert (2"-4")
	-4	Secondary flashing clamp (use with -AE only)
	-7	Ductile iron grate

	-15	Chained grate
	-19	Cast iron undergrate laminated top, nikaloy
	-20	Cast iron undergrate laminated top, bronze
	-49	3/4" primer tap
	-50	1/2" primer tap
	-88	Supplementary strainer
	-92	Galvanized cast iron parts
	-T	Threaded outlet
	-X	Inside caulk outlet
	-Y	Hub outlet with gasket (4" size only)
	-Z	No-hub spigot outlet

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

