

37830**Floor Drain****12" Top With Latching Grate****Specification**

Josam 37830 series coated cast iron floor drain, double drainage flange, seepage slots, bottom outlet, square top and heavy-duty hinged latching grate and removable sediment bucket.



Formerly 35620A series.

Grate free area: 54 IN²

STD. cast iron slot width: 3/8" (ADA)

-19 and -20 slot width 3/8" (ADA)

☐ Add 1/4" when furnished with nikaloy or bronze top.

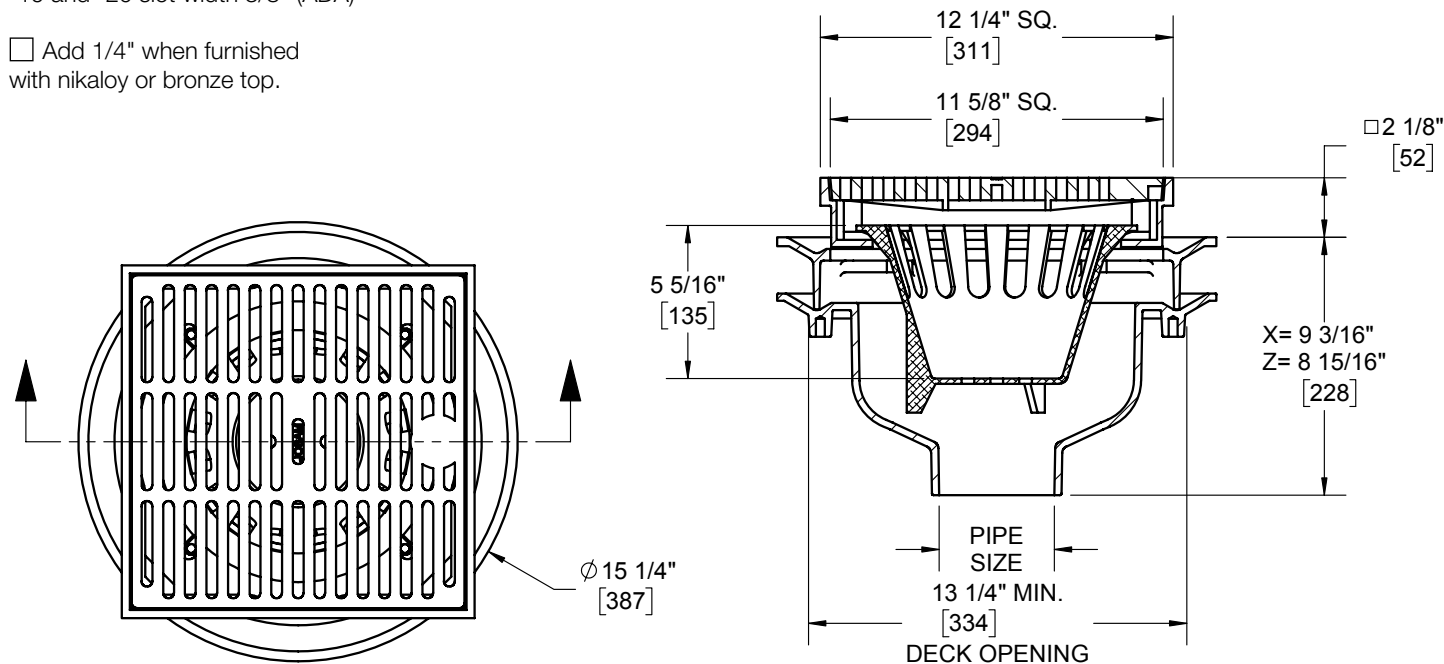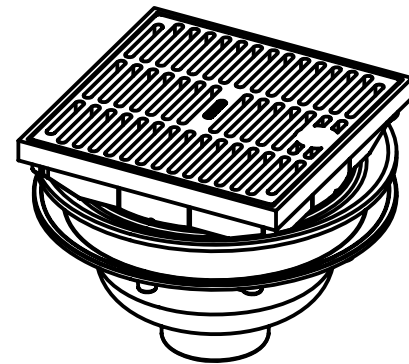

-7	Ductile iron grate
-19	Heavy-duty undergrate, satin finish nikaloy top
-20	Heavy-duty undergrate, satin finish bronze top
-21	Loose-set grate
-22	Less latching grate
-39	Solid cover
-49	3/4" primer tap
-50	1/2" primer tap

-66	No-hub side outlet
-69	Lift handle for sediment bucket
-84	Stainless steel mesh bucket liner
-92	Galvanized cast iron parts
-TSI	Trap seal insert (2" -4")
-X	Inside caulk outlet
-Z	No-hub spigot outlet

Pipe Size
2"
3"
4"
5"
6"

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

A WATTS Brand