

37840

Floor Drain

12" Top With Bucket

Specification




Josam 37840 series coated cast iron floor drain double drainage flange, seepage slots, bottom outlet, square top and heavy-duty secured grate and removable sediment bucket. Top frame serves as clamp ring.

Formerly 35330 series.

Slot width 3/8" (-19 & -20 slot width 3/8") (ADA)

Grate free area 54 SQ. IN.

☐ Add 1/4" when furnished with nikaloy or bronze top.

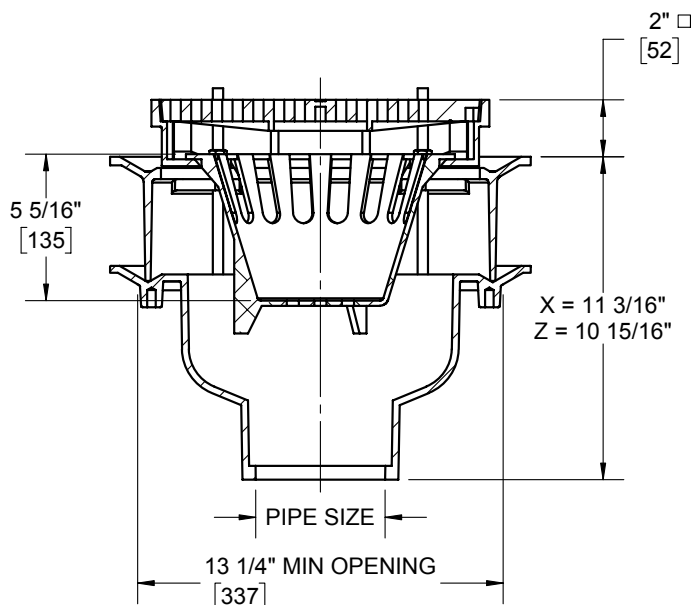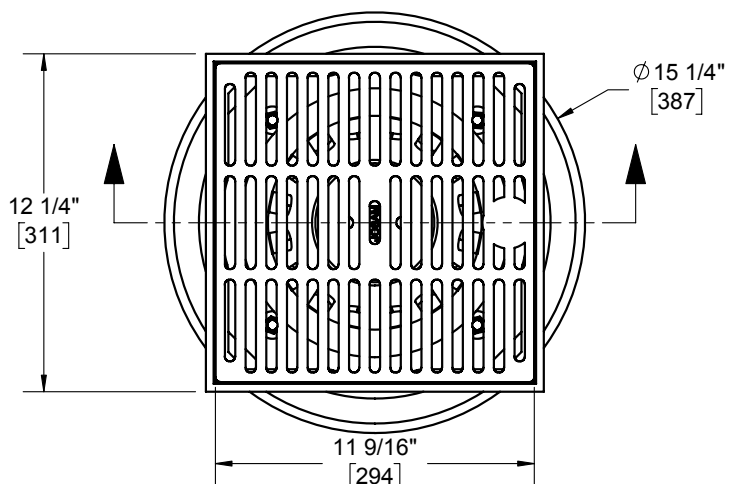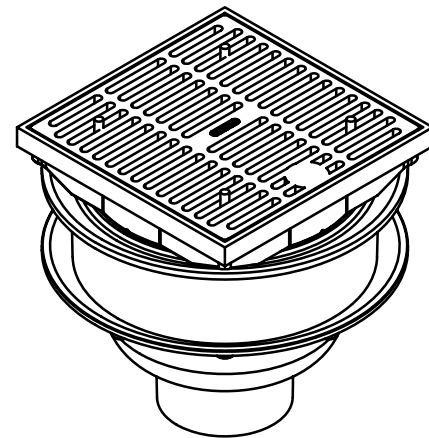

-7	Ductile iron grate	-70	Less bucket	Pipe Size
-14	Hinged grate	-88	Supplementary strainer	
-19	Heavy-duty ductile undergrate, satin finish nikaloy top	-84	Stainless steel mesh bucket liner	
-20	Heavy-duty ductile undergrate, satin finish bronze top	-92	Galvanized cast iron parts	
-39	Solid cover	-VP	Secured grate, vandal-proof screws	
-49	3/4" primer tap	-TSI	Trap seal insert (2"-4")	
-50	1/2" primer tap	-X	Inside caulk outlet	
-66	No-hub side outlet (2"-6" sizes only)	-Z	No-hub side outlet	
				2"
				3"
				4"
				5"
				6"
				8"

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



A WATTS Brand