

38040

Floor Drain

Round Top And Cleanout

Specification




Josam 38040 series coated cast iron combination floor drain and integral deep seal trap, side outlet spigot connection, round top, medium-duty loose-set Super-Flo® grate and cleanout protected by tractor cover.

Grate free area: 27 IN²

STD. cast iron slot width: 3/8" (ADA)

-1 and -2 slot width 3/16" (ADA and heel-proof)

☐ Add 1/4" when furnished with nikaloy or bronze top.

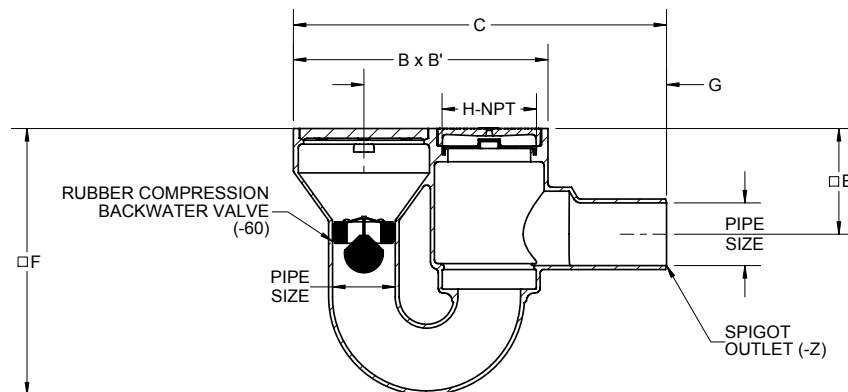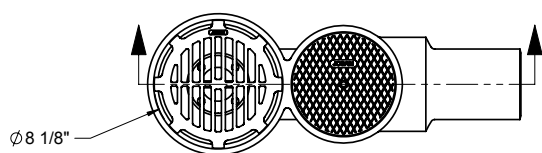

	Pipe size	B x B'	C	E	F	G	H
	2"	14-1/8 x 9	21-1/8	5-3/4	13-1/2	16-5/8	4
	*3"	16-1/4 x 9	23-13/16	6-3/4	17	19-3/8	5
	4"	16-1/4 x 9	23-13/16	6-3/4	17	19-3/8	5

*Note: 3" size uses a 4" body with 4" x 3" reducing coupling.

Note: -81 only with light duty grate.

	-1	Satin finish nikaloy top
	-2	Satin finish bronze top
	-7	Ductile iron grate
	-11	Extra heavy-duty grate
	-15	Chained grate
	-VP	Secured grate, vandal-proof screws
	-HP	Heel-proof grate, CI, 5/16" slot width, 25 SQ in free area
	-49	3/4" primer tap
	-50	1/2" primer tap

	-51	1-1/2" auxiliary thread inlet
	-52	2" auxiliary thread inlet
	-60	Backwater valve
	-81	Slotted cast iron bucket
	-81-92	Slotted iron bucket, galvanized parts
	-84	SS mesh bucket liner (must specify -81)
	-88	Supplementay strainer
	-92	Galvanized cast iron parts
	-TSI	Trap seal insert (N/A with -60)

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



A WATTS Brand