

46300 (00-XY)

SS Trench Channel

6" Wide

Specification

Josam series 46300 fabricated stainless steel (type 304, 2mm THK), 6" wide, v-shaped bottom, available with or without slope (1% STD.), with anchor tabs and leveling feet, no-hub bottom outlet and grate options. Run lengths longer than 13' provided with flanges and gaskets.

See 46300 tops drawing for grate details.

* 2" and 3" outlets use flat strainer.

☐ Linear run

Total run length (L) =

* Start height (H1) (STD. 2-3/8" [60]) =

☐ Height at outlet (H2) =

☐ Or STD 1% slope

☐ Outlet at end of run

☐ Outlet mid-run (spec. LENGTH L1)

☐ Non-linear run

Provide sketch with critical length and height dimensions and outlet location(s).

* When -FC is specified, start height (H1) is min. 4" [102]

OPTIONS:



☐	-FB	Filter basket*
☐	-SB	Sediment bucket (N/A 2", 3")
☐	-VP	Secured grate
☐	-316	Type 316L material
☐	-BW	Butt-weld outlet (spec. 10, 40, 80)
☐	-T	Threaded outlet (2"-3")
☐	-PFO	Push-Fit outlet diameter
☐	-FC*	Flange and clamp

X = Grate Type

☐	0	No grate
☐	1	Perforated sheet grate
☐	2	Anti-slip mesh grate
☐	3	Perimeter slot grate
☐	4	Ladder grate

Y = Outlet size

☐	2"
☐	3"
☐	4"

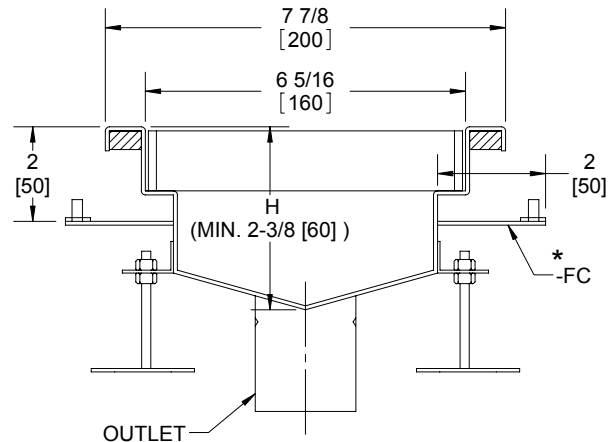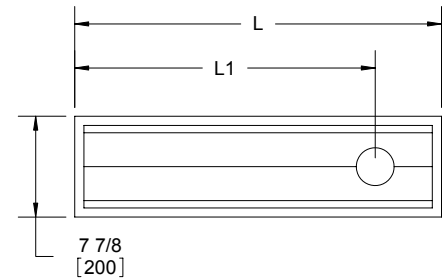

Authorized Project

Signature and date:

Name:

Title:

Signature:

Date:

Note: All SS trench channels are custom fabricated. Orders are non-cancellable and non-returnable.

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

