

46600-ET

SS Trench Channel

Elevator Trench

Specification


Josam series 46600-ET fabricated stainless steel (type 304, 2mm), 12" Nom. Wide, v-shaped bottom, no-hub bottom outlet with 46610-LS longitudinal slot grate. 100 GPM capacity. Run lengths longer than 13' provided with flanges and gaskets.

Grates:




Slot width: 1/4"

Meets ADA and heel-proof reqmt.

Load class 'A' "light-duty"

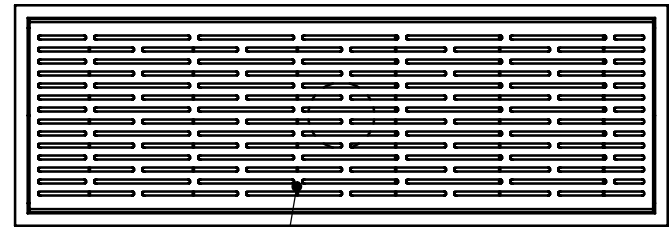

STANDARD GRATE
46610-LS GRATE
LONGITUDINAL SLOT
(FREE AREA = 38 in²/LF)

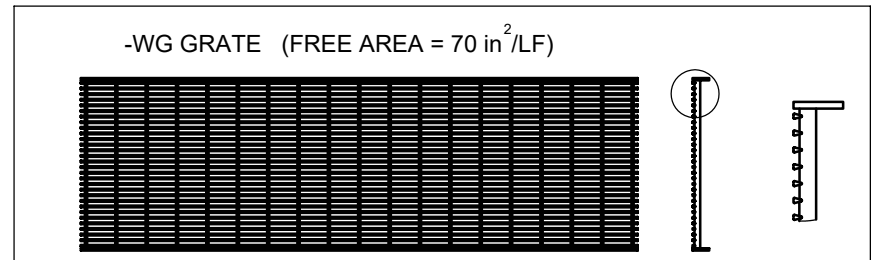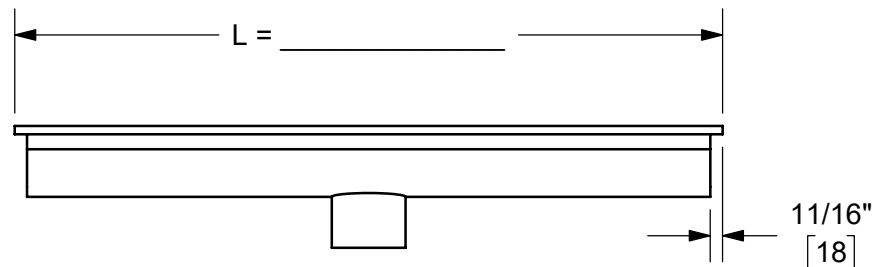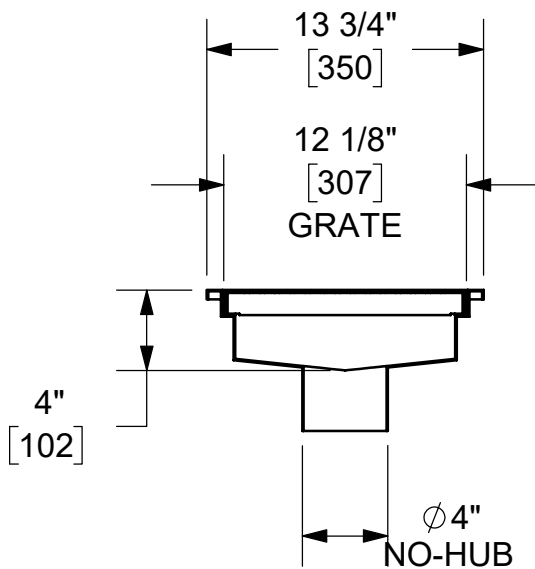

OPTIONS:

-FB	Filter basket*
-SB	Sediment bucket (n/a 2", 3")
-VP	Secured grate
-316	Type 316L material
-BW	Butt-weld outlet (spec. 10, 40, 80)
-PFO	Push-Fit outlet diameter
-WG	Wire type grate

Authorized Project

Signature and date:

Name:

Title:

Signature:

Date:

*Note: All SS trench channels are custom fabricated.
Orders are non-cancellable and non-returnable.*

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



A WATTS Brand