

46800 (XY)

SS Trench Channel

16" Wide

Specification




Josam series 46800 fabricated stainless steel (type 304, 2mm THK) (14 GA), 16" wide, v-shaped bottom, available with or without slope (1% STD.), with anchor tabs and leveling feet, no-hub bottom outlet and grate options.

Run lengths longer than 10' provided with flanges, gaskets and hardware.

See 46800 tops drawing for grate details.

** When -FC is specified, start height (H1) is min. 4" [102].

* 2" and 3" use flat strainer.

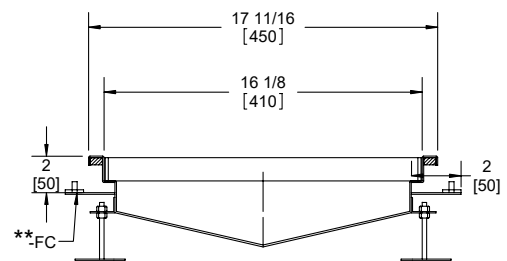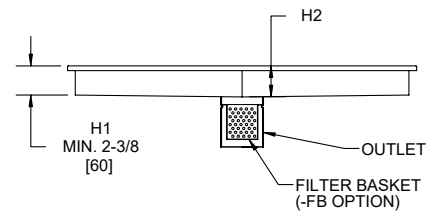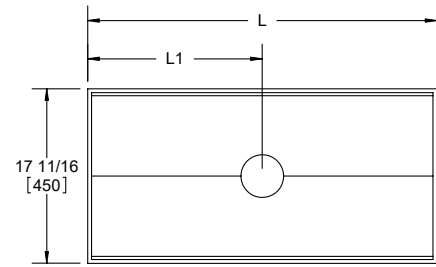

Specifications:

☐ Linear run

Total run length (L) = _____

* Start height (H1) (STD. 2-3/8" [60]) = _____

☐ Height at outlet (H2) = _____

☐ Or STD 1% slope

☐ Outlet at end of run

☐ Outlet mid-run (Spec. length L1) = _____

☐ Non-linear run

Provide sketch with critical length and height dimensions and outlet location(s).

X = Grate type

	0	No grate
	1	Perforated sheet grate
	2	Anti-slip mesh grate
	3	Perimeter slot grate
	4	Ladder grate

Y = Outlet size

	2"
	3"
	4"
	6"
	8"

OPTIONS:

☐	-FB	Filter basket*
☐	-SB	Sediment bucket (N/A 2", 3")
☐	-VP	Secured grate
☐	-316	Type 316L material
☐	-BW	Butt-weld outlet (spec. 10, 40, 80)
☐	-T	Threaded outlet
☐	-PFO	Push-fit outlet diameter
☐	-FC**	Flange and clamp

Authorized project signature and date:

Name: _____

Title: _____

Signature: _____

Date: _____

Note: All SS trench channels are custom fabricated. Orders are non-cancellable and non-returnable

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

