

47200-HP




SS Slot Channel

Heel-Resistant 5/16" [20 mm] Double Slots (XY)

Specification

Josam series 47200-HP fabricated stainless steel (type 304, 1.5 mm), heel-resistant 5/16" double slot, V-shaped bottom, available with or without slope (1% STD.), with anchor tabs and leveling feet, outlet box with bottom connection and grate options. Run lengths longer than 13' provided with flanges, gaskets, and hardware.

* 2" and 3" outlets come with flat strainer.

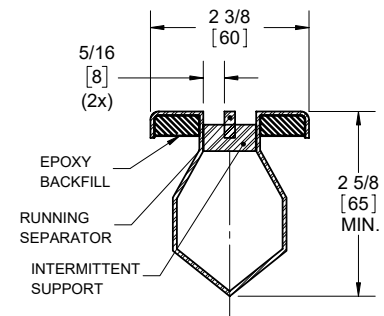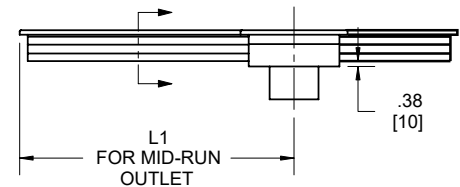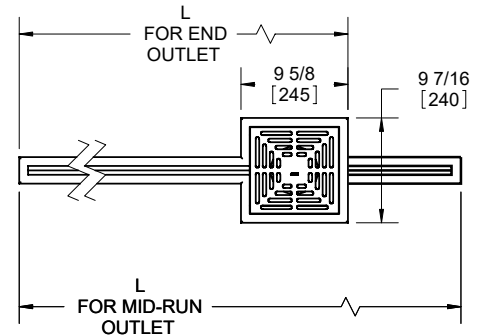

Specifications:

☐ Linear run

Total run length (L) = _____

* Start height (H1) (STD. 2-5/8" [65]) = _____

☐ Height at outlet box (H2) = _____

☐ Or STD 1% slope

☐ Outlet at end of run

☐ Outlet mid-run (Spec. length L1) = _____

☐ Non-linear run

Provide sketch with critical length and height dimensions and outlet location(s).

Authorized project signature and date:

Name: _____

Title: _____

Signature: _____

Date: _____

Note: All SS slot channels are custom fabricated. Orders are non-cancellable and non-returnable.

X = Outlet box grate type

0	No grate
1	Perforated sheet grate
2	Anti-slip mesh grate
3	Perimeter slot grate
4	Ladder grate

Y = Outlet size

2"
3"
4"

OPTIONS:

-FB	Filter basket*
-SB	Sediment bucket (4" outlet only)
-VP	Secured grate
-316	Type 316L material
-BW	Butt-weld outlet (spec. 10, 40, 80)

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



A WATTS Brand