

60100H-EXT

Grease Interceptor

Manual Type

Specification

Josam 60100H-EXT series epoxy coated fabricated steel grease interceptor, deep roughing integral extension flush-with-floor type, no-hub connections, internal trap, removable diffuser baffle, gasketed non-skid cover, flow control fitting and PDI seal of approval.

Conforms to plumbing and drainage institute standard PDI-G101 and ASME A112.14.3

Accepted for use City of New York
department of buildings MEA 255-06-E Vol.1

For custom extension height:

Specify "D" Dimension = _____ in.




New "G" Dimension = _____ in.
("C" + "D")

Product is non-cancellable and non-returnable

Name: _____

Signature: _____

Date: _____

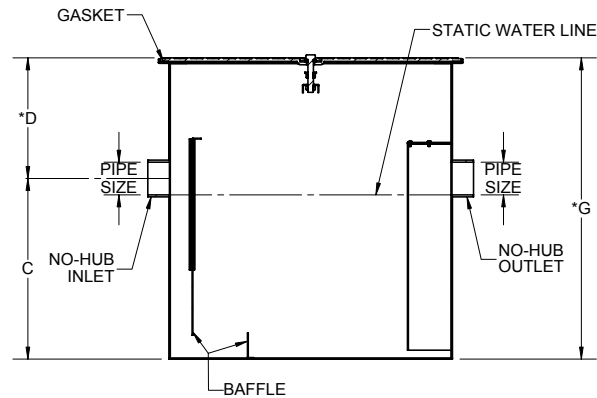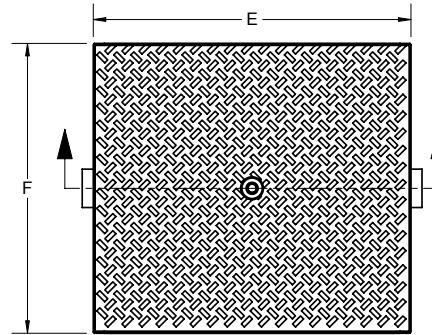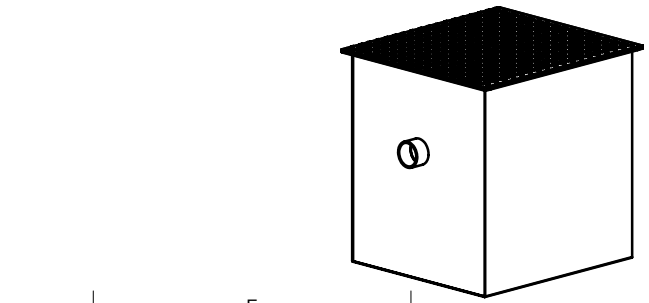

	-AC	Aluminum cover (N/A with -40, -HD)
	-SS	Stainless steel interceptor
	-GRD	Grease removal device (timer)
	-40	Cover recess for floor finish
	-61	Flange and clamp device
	-85	Enzymatic port in cover
X	-EXT	Extension, 6" standard (specify ext. height)
	-ISI	Integrated solids interceptor
	-HD	Heavy-duty cover

	Type	Flow (GPM)	Cap. (LBS.)	Pipe size	C	*D	E	F	*G
	60102H-EXT	7	14	2	8-1/4	9-3/8	14-7/8	13	17-5/8
	60103H-EXT	10	20	2	8-1/2	9-3/8	16-5/8	14-1/2	17-7/8
	60104H-EXT	15	30	2	9-1/2	9-3/8	20-3/8	17	18-7/8
	60105H-EXT	20	40	3	12	10-7/8	20-7/8	19	22-7/8
	60106H-EXT	25	50	3	13	10-7/8	23-3/8	21-1/2	23-7/8
	60107H-EXT	35	70	3	14-1/2	10-7/8	26-1/8	23	25-3/8
	60108H-EXT	50	100	3	16-1/2	10-7/8	27-7/8	25-1/2	27-3/8
	60109H-EXT	75	150	3	21	12	41	31	33
	60110H-EXT	100	200	4	23	14	47	35	37

*Dimensions based on standard 6" extension.

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

