

60100H-RT

Grease Interceptor




Manual Recessed Type

Specification

Josam 60100H-RT series epoxy coated fabricated steel grease interceptor, deep roughing flush-with-floor type, no-hub connections, internal trap, removable diffuser baffle, gasketed non-skid cover, flow control fitting, PDI seal of approval and steel frame with non-skid cover and adjustable interceptor carrier brackets.

Conforms to plumbing and drainage institute standard PDI-G101

Note: Interceptor support brackets adjustable for varying depths of floor construction.

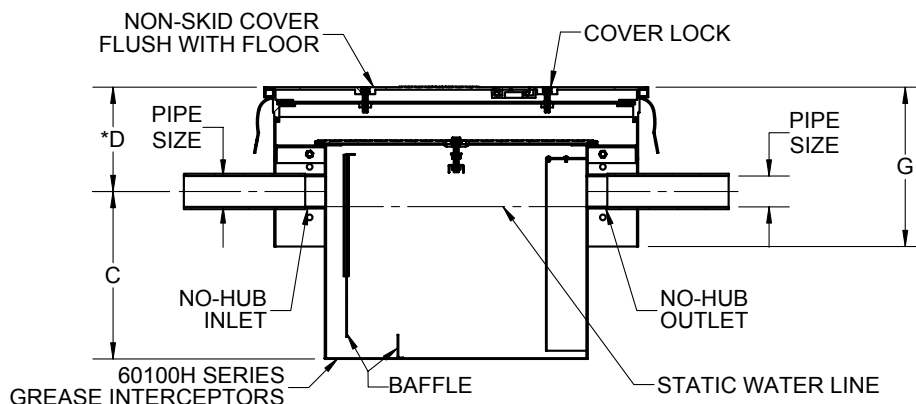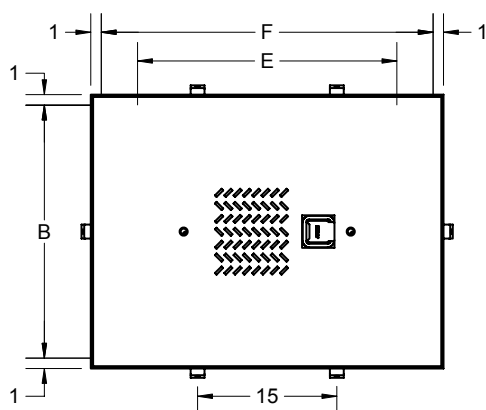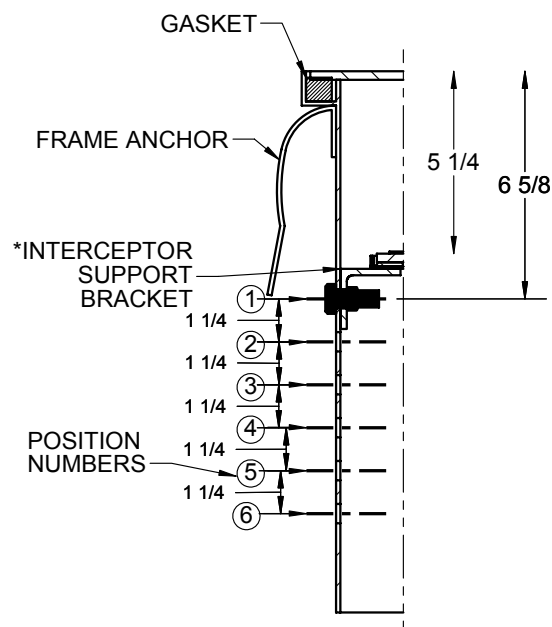

	-40	Cover recess for floor finish
	-61	Flange and clamp device
	-85	Enzymatic port in cover
	-ISI	Integrate solids interceptor
X	-RT	Recessed type
	-HD	Heavy-duty cover

	Type	Flow rate	Cap. (LBS.)	Pipe size	B	C	*D	E	F	G
	60102H-RT	7	14	2	15	8-1/4	8-3/4	14-7/8	23	15-3/4
	60103H-RT	10	20	2	16-1/2	8-1/2	8-3/4	16-5/8	24-3/4	15-3/4
	60104H-RT	15	30	2	19	9-1/2	8-3/4	20-3/8	28-1/2	15-3/4
	60105H-RT	20	35	3	21	12	10-1/4	20-7/8	29	15-3/4
	60106H-RT	25	50	3	23-1/2	13	10-1/4	23-3/8	31-1/2	15-3/4
	60107H-RT	35	70	3	25	14-1/2	10-1/4	26-1/8	34-1/4	15-3/4
	60108H-RT	50	100	3	27-1/2	16-1/2	10-1/4	27-7/8	36	15-3/4
	60109H-RT	75	150	3	33	21	11-3/8	41	49-1/8	15-3/4
	60110H-RT	100	200	4	37	23	13-3/8	47	55-1/8	15-3/4

*Dimensions based on interceptor in position #1 add 1-1/4" per each succeeding lower position.

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



A WATTS Brand