

60110-SA

Grease Interceptor



Semi-Automatic Shallow Type

Specification

Josam 60110A-SA series epoxy coated fabricated steel semi-automatic grease interceptor, shallow type, threaded connections, internal air-relief, visible double wall trap, removable baffle, gasketed non-skid cover grease recovery cone, flexible hose, grease draw-off valve and flow control fitting.

Formerly 60110-50A series.

Note: Height of 13" [330] required from top of interceptor to bottom of fixture.

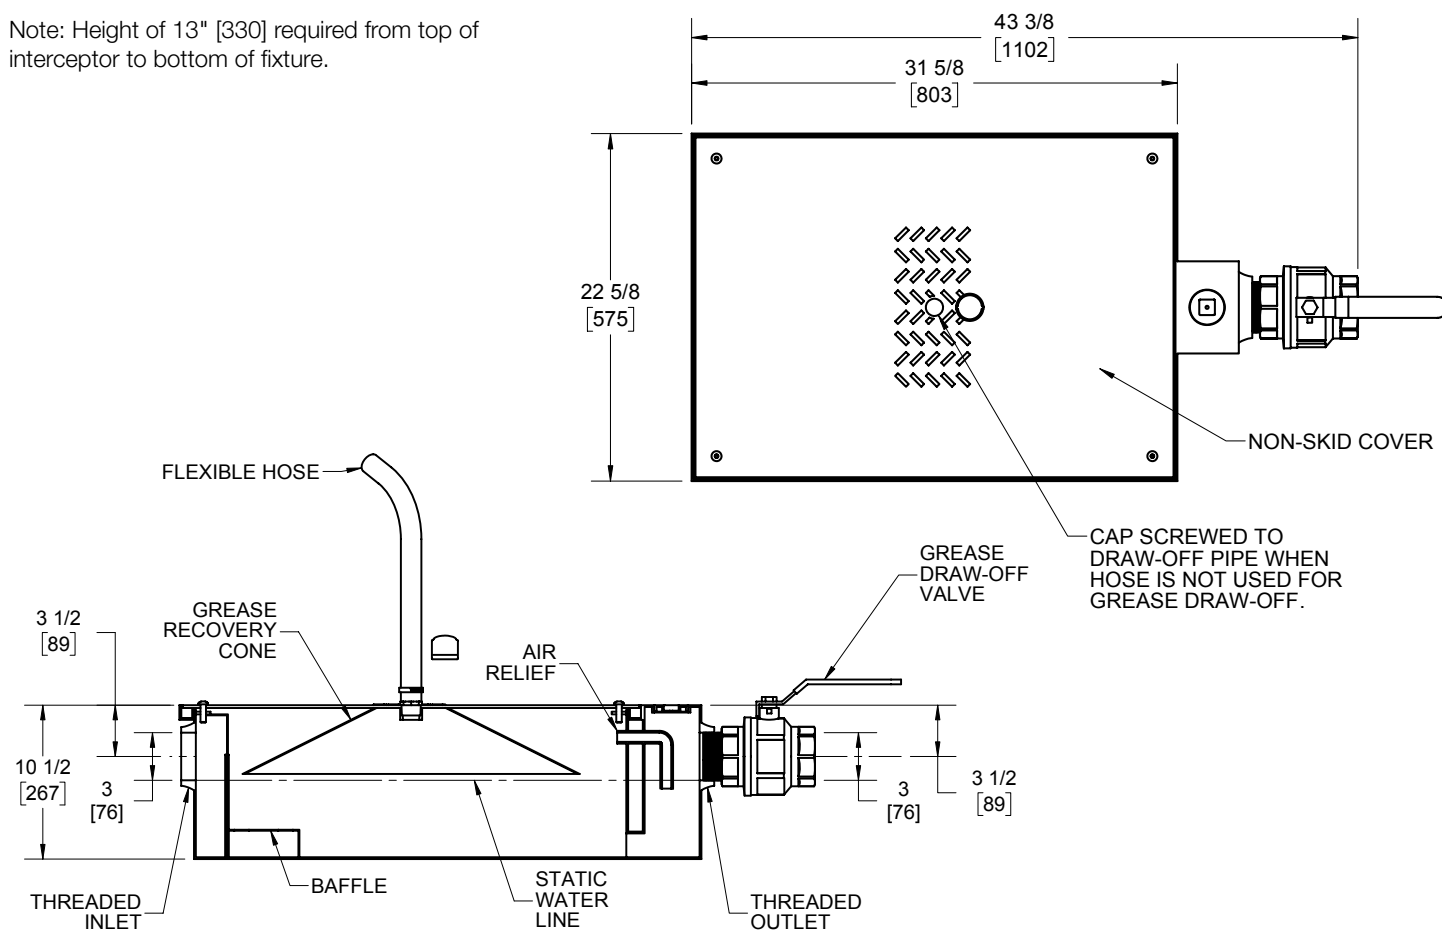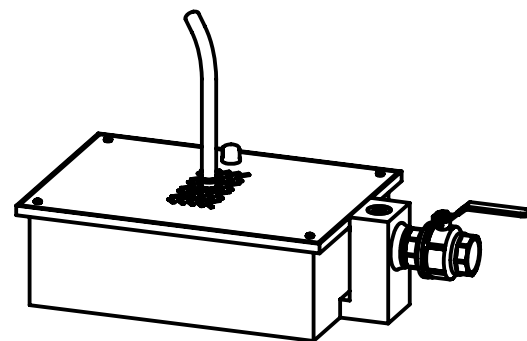

-65	Hub inlet, spigot outlet 2"
-66	Hub inlet, spigot outlet 3"
-85	Enzymatic port in cover

Type	Flow rate	Capacity
60115-SA	35 GPM [2.2 L/s]	70 lbs. [32 kg]

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

