

60210A-EXT




Grease Interceptor

Manual High-Volume Type

Specification

Josam 60210A-EXT series acid resistant epoxy coated fabricated steel grease interceptor, high volume, deep roughing, integral extension, threaded connections, internal air-relief, visible double wall trap, removable diffuser baffle, gasketed non-skid cover and flow control fitting.

Formerly 60200A series.

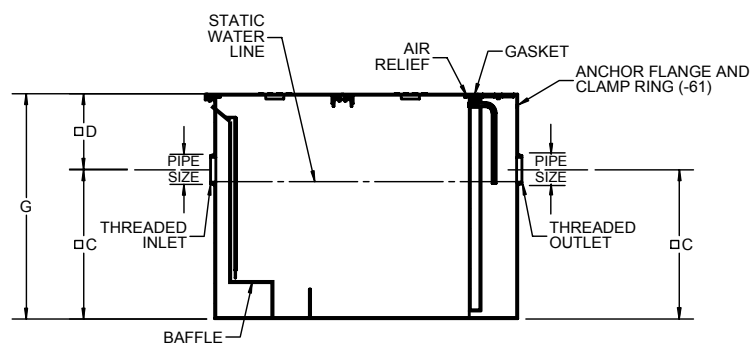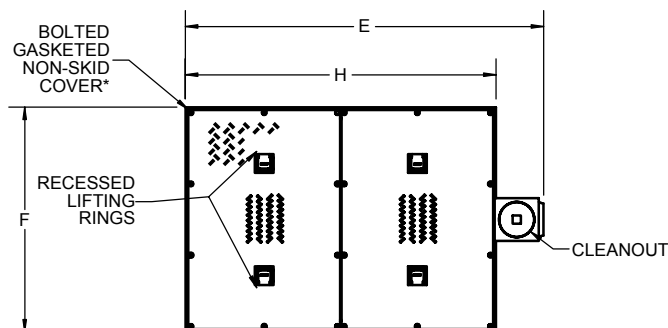

For custom extension height:

Specify "D" dimension= _____ in.

New "G" dimension= _____ in.
("C" + "D")

Product is non-cancellable and non-returnable

Name: _____

Signature: _____

Date: _____

OPTIONS:

X	-EXT	Extension, 6" standard (specify ext. height)
	-60	Anchor flange
	-61	Flange and clamp device
	-ISI	Integrated solids interceptor
	-HD	Heavy-duty cover

	Type	Flow rate	Cap (LBS)	Pipe size	C	□ D	E	F	□ G	H
	* 60213A-EXT	150	300	4	27	14	60	39	41	53
	60214A-EXT	200	400	5	31-1/2	16	67	42	47-1/2	58
	60215A-EXT	250	500	5	35-1/2	16	72	46	51-1/2	63
	60216A-EXT	350	700	6	39-1/2	18	80	52	57-1/2	71
	60217A-EXT	500	1000	6	43-1/2	18	91	59	61-1/2	82

□ Dimensions based on standard 6" extension.

* This size furnished with one-piece cover.

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

