




60610A

Oil Separator

Draw-Off, High-Volume Type

Specification

Josam 60610A series epoxy coated fabricated steel oil separator, high-volume, threaded connections, visible double wall trap and sediment bucket, adjustable gravity draw-off either side, two vent connections on each side, gasketed non-skid cover and flow-control fitting.

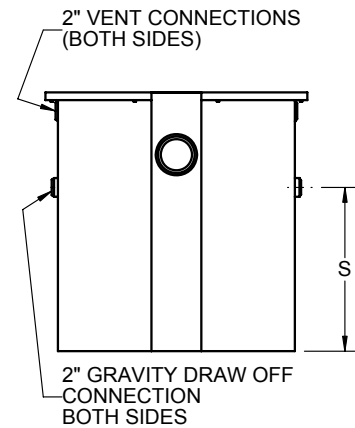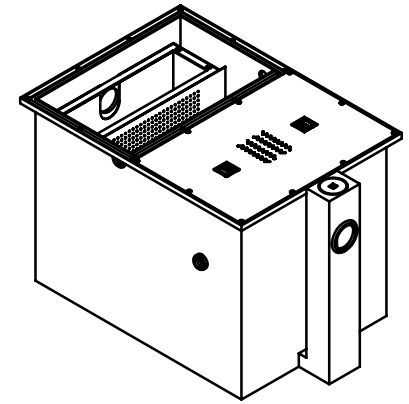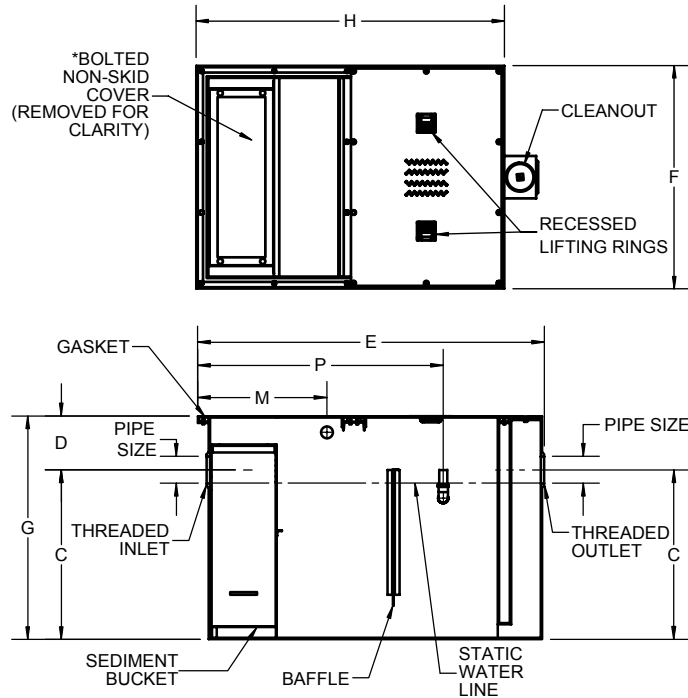

Product is non-cancellable and non-returnable

Name: _____ Signature: _____ Date: _____

OPTIONS:

Δ	-EXT	Extension, 6" standard (specify ext. height)
	-EST	Extra storage tank
	-60	Anchor flange (-EXT required)
	-61	Flange and clamp device (-EXT required)
	-HD	Heavy-duty cover (must specify with separator order)

Δ Separate submittal for this option available.

* This size furnished with one-piece cover.

Type	Flow rate	Pipe size	C	D	E	F	G	H	M	P	S
* 60611A	75	3	21	6	48	31	27	41	20-3/4	31	13-1/2
* 60612A	100	4	23	8	54	35	31	47	24	36-1/2	15-1/4
* 60613A	150	4	27	8	60	39	35	53	27	41-1/2	19-1/4
60614A	200	5	31-1/2	10	67	42	41-1/2	58	29-5/8	45-5/8	26-1/4
60615A	250	5	35-1/2	10	72	46	45-1/2	63	32-3/4	50-1/4	29-3/4
60616A	350	6	39-1/2	12	80	52	51-1/2	71	36-1/2	56-1/4	34-1/4
60617A	500	6	43-1/2	12	91	59	55-1/2	82	43	66	38-1/4

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

