

67500

Backwater Valves


Hub & Spigot Swing-Check Specification

Josam series 67500 coated cast iron backwater valve, offset type, bronze swing-check assembly, bolted gasketed cover and hub & spigot connections.


Note: Ref. XH pipe dimensions.

Valve normally hangs in closed position, can be set to hang open (-15) open flap position.

-10 OPTION

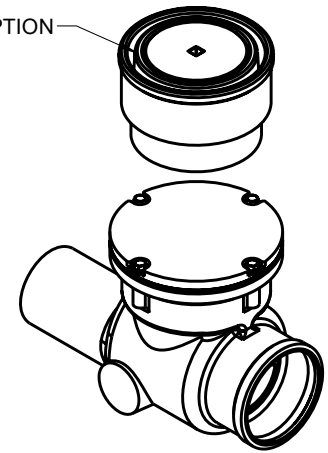

**BOLTED COVER,
OFFSET TYPE**

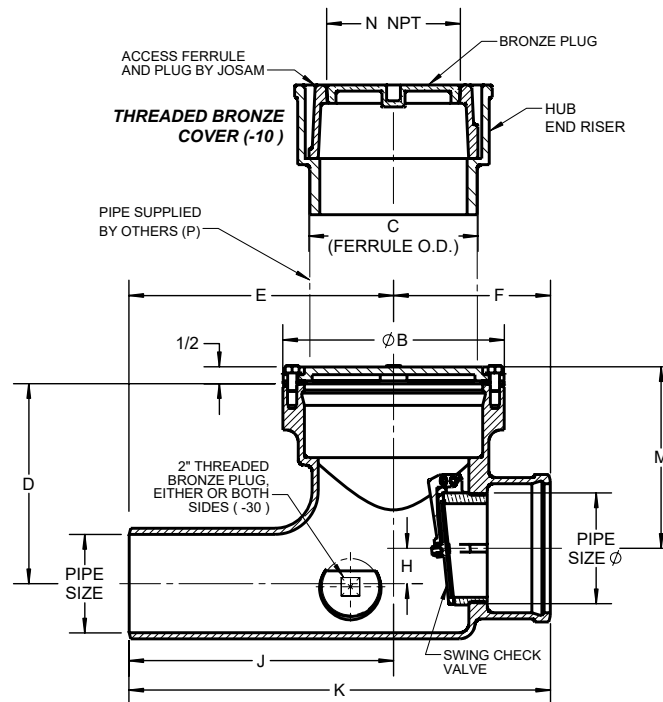

OPTIONS:

-10 *	Threaded bronze cover (3" - 8" sizes only)
-15	Flap in partially open position
-30	2" Auxiliary inlet with bronze plug

* For extension, use "-10" option with hub & spigot pipe by others.

	Pipe Size	Dia. "B"	Dia. "C"	Dim. "D"	Dim. "E"	Dim. "F"	Dim. "H"	Dim. "J"	Dim. "K"	Dim. "M"	"N" NPT	"P" Pipe size
	2"	6-7/8	N/A	6-1/4	7	5	1-1/2	6-1/2	12	5-1/4	N/A	N/A
	3"	7-7/8	5-7/8	7-1/2	10	5-3/4	1-1/4	9	15-3/4	6-3/4	4	5" S.W. H.S.
	4"	9	6-7/8	8-1/8	10-3/4	6-3/8	1-1/2	9	17-1/8	7-1/4	5	6" S.W. H.S.
	6"	11-1/4	9	10	11-3/4	7-3/4	1-3/4	10-3/4	19-1/2	8-3/4	7	8" S.W. H.S.
	8"	13-3/4	11-1/8	11-3/4	12-1/2	7-3/4	2-1/4	11	20-1/4	10	9	10" S.W. H.S.

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

