

JF


SS Fitting

Push-Fit P-Trap

Specification

Josam Push-Fit™ type 316L stainless steel fitting, p-trap with EPDM gasketed socket.

Dimensions in inches [mm] unless otherwise noted.

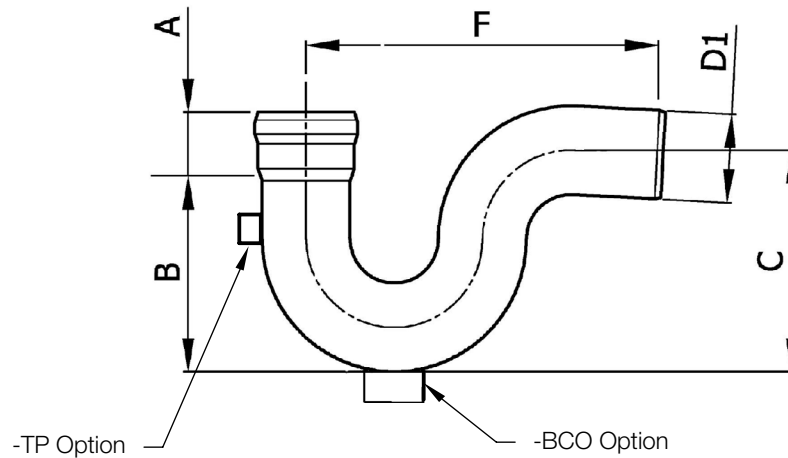

Options		
	-BCO	Bottom Cleanout
	-TP	1/2" Trap Primer Connection

- Options are modifications to standard product
- Orders with options are non-cancelable and non-returnable

	Part Number	Nom. Pipe Size	D1 (Pipe O.D.)	A Min. Insert Depth	B	C	F	Trap Seal Depth
	JF-2506	1-1/2"	1.7 [42]	1.2 [30]	3.0 [76]	4.1 [105]	6.8 [172]	1.7 [42]
	JF-2508	2"	2.1 [53]	1.5 [38]	3.6 [92]	5.2 [133]	8.3 [212]	2.1 [53]
	JF-2510	3"	2.9 [73]	2.2 [55]	4.7 [120]	7.2 [183]	11.3 [288]	2.9 [73]
	JF-2512	4"	4.0 [102]	2.8 [70]	6.3 [161]	10.2 [260]	15.4 [390]	4.0 [102]
	JF-2514	6"	6.3 [159]	3.1 [80]	9.9 [252]	15.6 [398]	22.0 [558]	6.3 [159]

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

