





100CXX-12

PRO-PLUS®

4" Internal Width

Specification

Josam 100CXX-12 series channels shall be 19.7" (500) Long with 4" (102) internal width and radiused bottom. Interconnecting channel sections shall be made of SMC/GRP (sheet molding compound/glass reinforced polyester) material and available with and without slope. Channel support brackets capable of accepting re-bar, end outlets, bottom outlets, endcaps, and corner/T connectors shall be available. Grate options for loading classes A-E with pressure or locking bolt securing devices and ductile iron rail to protect channel edges shall be available.

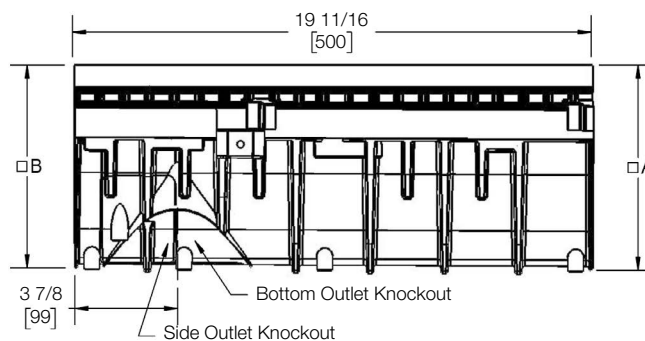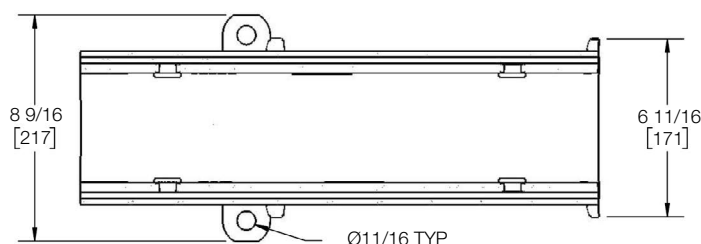

□ Note: Add 1.2" When furnished with DI frame 152431

Part Number	DIM "A"	DIM "B"	Weight (LBS)
100C-12	6.5	6.5	4.6
100C01-12	7.6	7.7	6.2
100C02-12	7.8	7.9	6.3
100C03-12	8.0	8.1	6.4
100C04-12	8.2	8.3	6.5
100C05-12	8.4	8.5	6.5
100C05N-12	8.5	8.5	6.6
100C06-12	8.6	8.7	6.7
100C07-12	8.8	8.9	6.7
100C08-12	9.0	9.1	6.9
100C09-12	9.2	9.3	7.0

Part Number	DIM "A"	DIM "B"	Weight (LBS)
100C10-12	9.4	9.5	7.1
100C11-12	9.6	9.7	8.6
100C12-12	9.8	9.9	8.7
100C13-12	10.0	10.1	8.8
100C14-12	10.2	10.3	8.9
100C15-12	10.4	10.5	9.0
100C15N-12	10.5	10.5	9.1
100C16-12	10.6	10.7	9.1
100C17-12	10.8	10.9	9.2
100C18-12	11.0	11.1	9.3
100C19-12	11.2	11.3	9.4
100C20-12	11.4	11.5	9.5

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



A WATTS Brand