


12000-30

Closet Carrier

Specification

Josam 12000-30 series coated cast iron universal closet carrier with adjustable closet connection, pylon feet, anchor foot, cast iron extension with adjustable connector, plated trim and coated accessories and neoprene fixture gasket. For use with both blowout or siphon jet water closets.

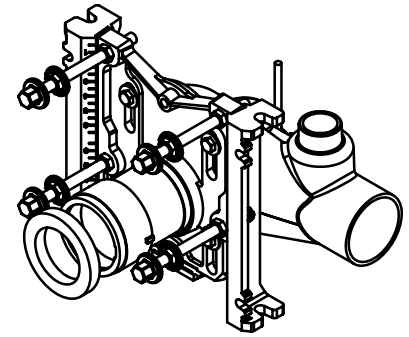

△ For dimension shorter than 5-1/2" (1" min) cut extension. For longer extension (10-1/2" max) specify (-10).

☒ Recommend feet be secured to floor with 1/2" bolts and anchors (by others).

⊗ For siphon jet roughing over 6" or blowout roughing over 12-1/2" specify on order.



Siphon jet dims shown. For blowout dims, use:

□ Min 2" and max 4"

▤ Min 11" and max 16 1/2"

⊙ Aux inlet is 6" offset from vent.

Dimension "B" varies with fitting.

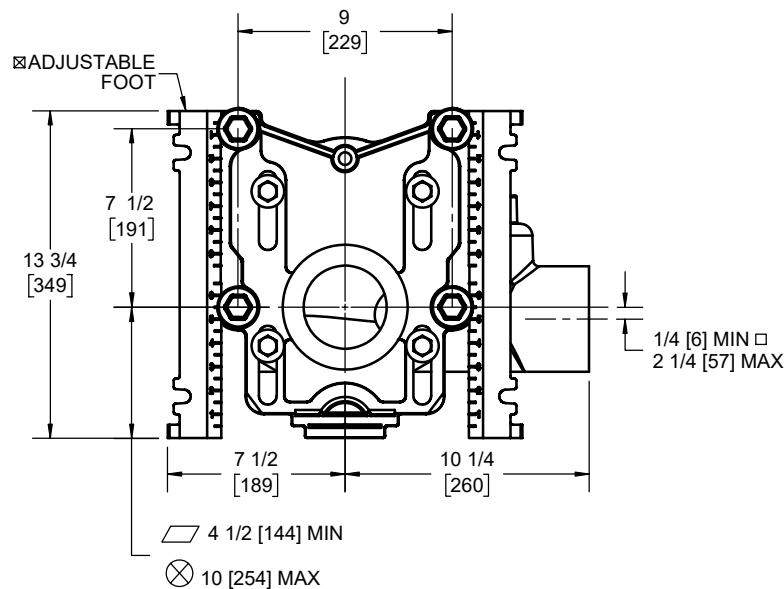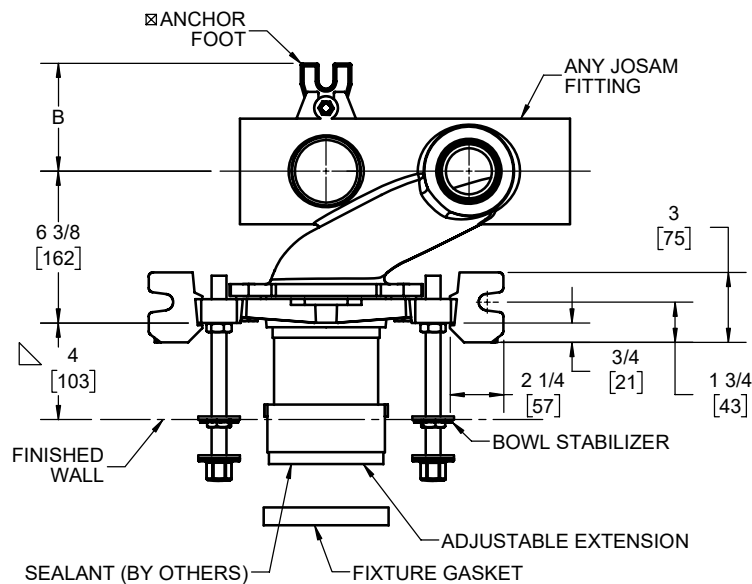

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



A WATTS Brand