12724-XSD


Bariatric Carrier Vertical Back-To-Back


Specification

Josam 12724-XSD series coated cast iron double vertical 4" no-hub on stack fitting with 2" no-hub offset vent, adjustable carrier body, invertible for siphon jet or blowout closets, with ABS extension with integral test cap, pylon feet, anchor foot, plated hardware and neoprene fixture gasket.

Recommend concrete anchors with 750 LBS pull-out force each.

This product meets or exceeds the requirements of ANSI A112.6.1M-1997 when tested at 1,000 pounds.



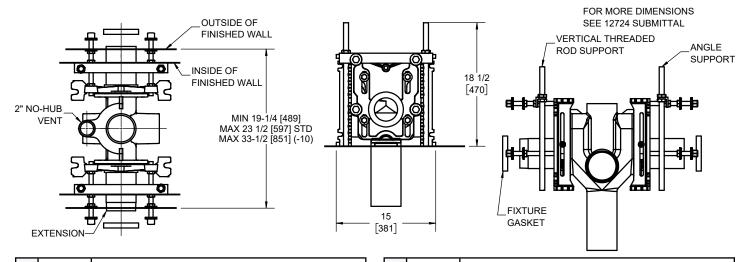

X	-XSD	Extra special-duty 1,000 LB carrier
	-PF	Pylon foot, STD
	-OR	O-ring carrier
	-HS	Hub and spigot
	-VS4	Vent side 4" no-hub branch
	-OS4	Opposite vent 4" no-hub branch
	-HVS4	Vent side 4" hub branch
	D4	Double 4" no-hub branches
	-HD4	Double 4" hub branches
	-VP	Vandal-proof trim
	-1	Positioning frame

-6	Supply pipe support (specify type of pipe)
-10	ABS extension through 10-1/2" wall
-24	Floor mounted back outlet China bowl
-30	Cast iron adj. extension w/ connector
-30-2	Cast iron adj. extension w/ connector and test cap
-32	Carrier for wide chase installations
-35	Carrier for wheelchair high rough
-49	No-hub auxiliary inlet, under vent
-50	No-hub auxiliary inlet, opposite vent
-53	Threaded auxiliary inlet, under vent
-54	Threaded auxiliary inlet, opposite vent

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

(JOSAM)

T: (800) 365-6726 • Josam.com

A WATTS Brand

ES-J-12724-XSD 2510 © 2025 Josam