15964


Closet Carrier 90° Institutional Fitting


Specification

Josam 15964 series coated cast iron vertical 4" no-hub double waste 90° stack fitting with 4" branches, 2" no-hub vent, with close carriers invertible for siphon jet or blow-out closets, ABS extensions with integral test caps, buttress feet, plated hardware and fixture gasket.

- ∑ For dimension shorter than 5-1/2" (1-3/4" min) cut extension. For longer extension (10-1/2" max) specify (-10).
- ⊠ Recommend feet be secured to floor with 1/2" bolts and anchors (by others).

Siphon jet dims shown. For blowout dims, use:

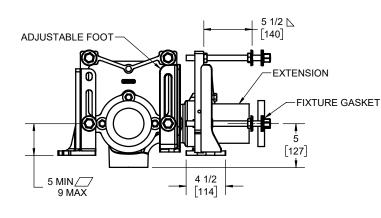

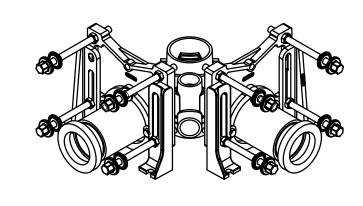

—2" THREADED AT 4 AUXILIARY INLET (
-	8 5/8 2 1/2 [64]
	7 1/2 5 [191] 27]
3 1/8 19 1/8	9 [229]
[486] 2" NO-HUB VENT	BOWL
	2 3/8 STABILIZER [59]
# =	2 2" NO-HUB AUXILIARY INLET (-49) — FINISHED WALL
8 1/8 [205]	5 7/8 [149]

-VP	Vandal-proof trim
-1	Positioning frame
-6	Supply pipe support (specify type of pipe)
-10	ABS extension through 10-1/2" wall
-24	Carrier for floor mounted back outlet china bowls

-26	Fitting anchor foot
-30	Cast iron adjustable ext w/ conn
-30-2	Cast iron adj. ext. w/ conn and test cap
-49	No-hub high auxiliary inlet, under vent
-54	Threaded high auxiliary inlet, opposite vent

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



T: (800) 365-6726 • Josam.com A WATTS Brand

ES-J-15964 2510 © 2025 Josam